


# Antenna Support / Turntables

## Video & Audio Systems

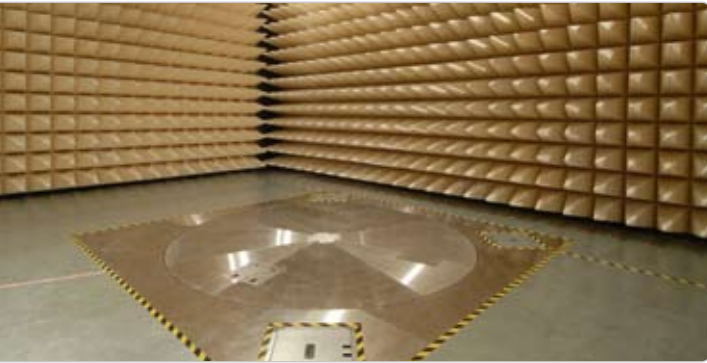

Turntable

### Antenna Support / Turntables

An antenna support and a turntable including the necessary controller and feed-throughs for the control lines are available and may be ordered as an option (see our separate catalogue).



Antenna support

### Video & Audio Systems


Video and audio systems for EUT and / or chamber monitoring including the necessary controllers and feed-throughs for the control lines are available and may be installed as option (see our separate catalogue).



Controller for CCTV and Intercom



Camera fixed on a tripod for EUT monitoring



Dome-camera fixed on a wall for chamber monitoring

### Shielding Attenuation

For measurements according to EN 50147-1 we guarantee at least the following shielding attenuation values for our RF-shielded rooms / halls:

Frequency	Shielding attenuation with single leaf and sliding doors	Shielding attenuation with double leaf doors	
10 kHz	≥80 dB	≥60 dB	Magnetic field
100 kHz	≥100 dB	≥70 dB	Magnetic field
1 MHz	≥100 dB	≥80 dB	Magnetic field
100 MHz	≥120 dB	≥100 dB	Plane wave
400 MHz	≥120 dB	≥100 dB	Plane wave
1 GHz	≥120 dB	≥80 dB	Plane wave
1 GHz ...	≥100 dB	≥70 dB	Microwave
18 GHz	90 dB	≥60 dB	Microwave
Optional:			
18 GHz ... 40 GHz	90 dB - 80 dB	Not available	Microwave