


# Transient Limiter

**TL-B0930A/B**  
**TL-B1530A/B**  
**TL-H0901A/B**

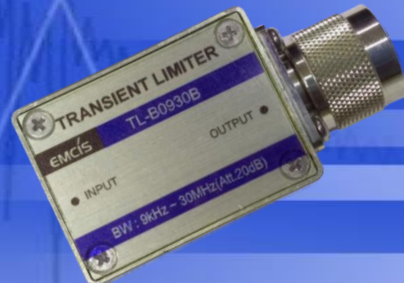

- Applicable to Spectrum Analyzer, EMI Receiver .
- Protect RF Input Port against over voltage.
- Equipped High Pass Filter.

## KEY FEATURES

- In measuring, connect to RF Input of Spectrum Analyzer or EMI Receiver.
- Prevent RF Input circuit of Spectrum Analyzer or EMI Receiver from being damaged by high-level transients in powerline disturbance.
- Frequency Range is from 9kHz to 1 GHz per band, two types for 10dB and for 20dB.
- Equipped High Frequency Pass Filter, so attenuate higher harmonic.

## Specification

Model	Frequency Range	Attenuation
TL-B0930A	9kHz ~ 30MHz	10dB ±4dB
TL-B0930B		20dB ±4dB
TL-B1530A	150kHz ~ 30MHz	10dB ±4dB
TL-B1530B		20dB ±4dB
TL-H0901A	9kHz ~ 1GHz	10dB ±4dB
TL-H0901B		20dB ±4dB

Impedance	50Ω
Input Connector	N – male
Output Connector	BNC – female
Dimensions	W35 D65 H45 (mm)

## CONFIGURATION

