

Magnetic-Field Test System / Low-Frequency Test System for Emission and Immunity Tests / MTS-800



Description

The MTS-800 is a compact test system for broadband generation and measurement of magnetic fields. Its internal components allow automatic EMC tests according to automotive standards where high field strength need to be generated or measured.

In combination with our triaxial Helmholtz coils full automated susceptibility tests are possible at magnetic field strength up to 1000 A/m for frequencies from DC to 1 kHz. Lower field strength can be generated for frequencies up to 250 kHz. Due to the triaxial set-up of our Helmholtz coil major improvement in device handling is achieved because there is no need to turn an EUT during tests.

The MTS-800 complies to all magnetic field requirements of relevant EMC and military standards.

Tests and measurements are controlled by a program which will set most parameter automatically. For any relevant standard, which are fulfilled by the MTS-800, limit values are already included into the software package, although any different value can be defined by a user. After every test full reports will be created automatically. Report layout is pre-defined, though any user-defined layout is possible. High performance is guaranteed by a self-calibration process which utilizes an internal source as reference.

According to

IEC/EN 55103-1/2, IEC/EN 61000-4-16, IEC/EN 61000-4-8, SAE J1113-22, ISO 11452-8, MIL-STD-461E (CE101, RE101, CS101, CS109 and RS101), Automotive manufacturer standards

Special Features:

- Frequency range for emission and immunity measurements: DC – 250 kHz
- 800W precision power amplifier, signal generator and spectrum analyzer in one compact unit
- All instruments may as well be used as stand-alone devices
- Powerful but easy to operate software, fully expandable for future standards modifications
- Standard software allows easy operation, report generation and integration of external measuring instrument for EUT monitoring
- Prepared for connection of external multimeter for EUT control
- Fully automated tests with triaxial Helmholtz coil. Software controlled generation of magnetic field in x-, y- and z- direction; no need to turn the EUT!
- Large variety of extensive accessories available

Magnetic-Field Test System / Low-Frequency Test System for Emission and Immunity Tests / MTS-800

Applications:

Magnetic Field Generation

MTS-800 enables a user to generate strong magnetic fields up to 1000 A/m. Even alternating fields up to 250 kHz can be generated by the magnetic test system.

Automotive Testing

Intensive testing is required for new products which should be used in any automotive application. The MTS-800 allows fast and easy testing according to many automotive standards as described before.

Low Frequency emission and immunity tests

acc. to MIL-STD 461E, CE 101, RE 101, CS 101, CS 109 and RS 101. Individual software modules and hardware accessories are available for each of these tests.

Features:

Automatic Testing Capabilities

Full compliance with several immunity test as ISO 11452-8, MIL-STD-461E/F RS101, CS101, CS109, IEC/EN 55103-2, IEC/EN 61000-4-8, SAE J1113-2, SAE J1113-22, Ford ES-XW7T-1A278-AC, GM W3097, PSA B21 7110, Renault 36-00-808, DC-11224, DC 10614 and similar standards.

Furthermore the MTS-800 allows emission measurements according to MIL-STD-461E/F RE101, CE101 and IEC/EN 55103-1.

Software

Any function is controlled via an application software which also guide the user through any test or measurement. Adaptation of signal strength or measurement graphs are possible at any stage. User defined signals complement the usage for fast and reliable tests. The application software is written in LabVIEW which guarantees stable and fast performance on any Microsoft® Windows platform.

Components

MTS-800 consists of three independent module: a signal generator (DC – 250 kHz), a power amplifier (800 W output maximum, DC – 1MHz bandwidth) and spectrum analyzer (16 Bit, 1 MSPS sampling rate). All modules can be used as stand-alone units.

Self-calibration

Using an ultra-stable voltage source self-calibration correction values are stored in an internal EEPROM. Any voltage signal or voltage measurement device is calibrated at a self-calibration process automatically in about a minute.

Accessories

Frankonia provides also many different coils and loop sensor which are ideally suited for the described tests. Any additional equipment is ready to use without a need for recalibration. Not only our own equipment can be used with the MTS-800, but also user defined coils. A calibration mode is included in the software to complement the magnetic test system with any further equipment.

Magnetic-Field Test System / Low-Frequency Test System for Emission and Immunity Tests / MTS-800

The software starts with the generator/amplifier control panel. This window allows basic settings of generator and amplifier.




Control Panel

Open the Magnetic field measurement window for spectrum analyzer measurements. Perform a single or continuous measurement. Perform test according to predefined standards.



Measurement results

Edit a predefined standard or create a new one. Load, save and print data.

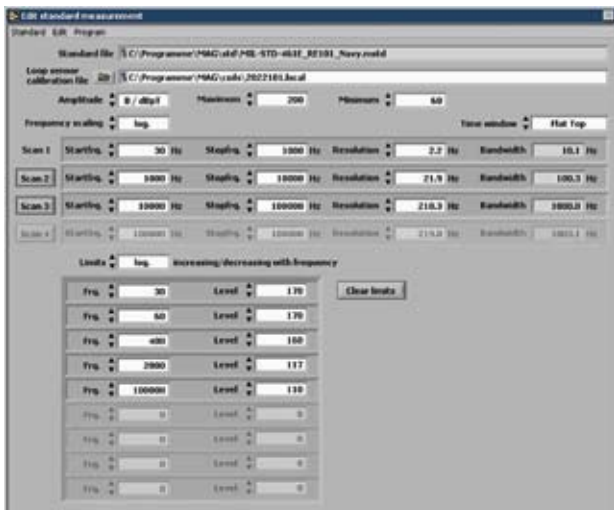

Example standard file for MIL-STD-461E / RS101_Navy

Open the Magnetic field generation window for susceptibility tests according to predefined standards.



Standard generation window

Open the continuous generation window for long term magnetic field test.



Magnetic field continuous generation window

Further features and possibilities:

Susceptibility tests with fixed frequencies and test levels or use the ramp function to sweep from start to stop level. Verify the generated field of any radiating coil with loop sensor.

Short term generation window for short term magnetic field tests (optional).

Scope mode window.

Determine the coil factor of an unknown coil

Self calibration of the MTS-800

Magnetic-Field Test System / Low-Frequency Test System for Emission and Immunity Tests / MTS-800

Technical specifications	
Voltage input (Analyzer)	
Frequency range	DC - 250 kHz
Input impedance	1 M Ω / 50 Ω switchable
Connector	XLR, unbalanced
Max. input voltage	100 V continuous (attenuator autoset at overvoltage); 10 V at 50 Ω
Gain	-20/0/20 dB Preamplifier, 0/20/40 dB ADC Amplifier; Self-calibration with ultra stable on-board reference
Current input	
Frequency range	DC - 250 kHz
Shunts	10 m Ω / 1 Ω / 100 Ω
Max. input current	20 A continuous (overload protection); 1 Ω and 100 Ω shunt are protected by an additional 1.5 A fuse
Connector	4 mm safety jack (+, -) measurement via insulation amplifier or input jacks
Measurement range	20 A, 10 A, 1 A, 100 mA, 10 mA, 1 mA automatic offset and gain; Self-calibration with ultra stable on-board reference
AD converter	
Resolution	16 Bit
Sampling rate	1.25 MSPS
Aliasingfilter	0.01 dB Tschebyscheff filter, fg = 260 kHz; filter may be switched off
Generator	
Frequency range	DC - 250 kHz
Output impedance	50 Ω
Connector	BNC, unbalanced
Signal	Sine wave / triangular /square wave/ DC
Amplitude	0 to 10 VAC, -10 V to +10 VDC
Resolution	12 Bit (2.5 mV), Switchable - 20 dB Attenuator; Self-calibration with ultra stable on-board reference
Amplifier	
Frequency range	DC - 1 MHz
Connector	4 mm safety jacks (output); BNC, unbalanced (input)
Current	16 Arms
Voltage	50 Vrms / 75 VDC
Distortion (DC-100 kHz, load \geq 4 Ω)	< 0.10 %
General data	
EUT control / Connector	9-pin Sub-D; RS232
Connection to Computer	USB
Temperature range	0 to 40 $^{\circ}$ C
Warm-up time	15 min.
Housing	19"-Subrack or desktop case
Dimensions (W x H x D)	449 x 177 x 580 mm
Weight (shipping)	approx. 40 kg (net 34 kg)
Gain	10 \pm 0.1 % (\pm 0.01 % / $^{\circ}$ C)