


# Open TEM-Cells

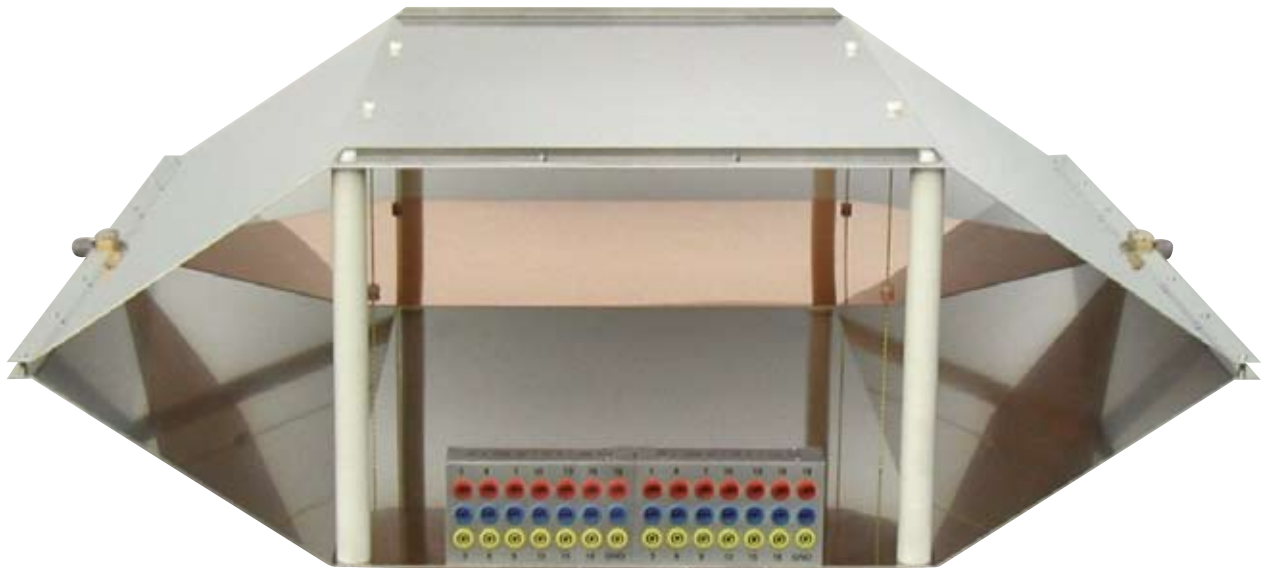

## Description

These open TEM-cells are well suited for immunity testing of small objects according to European (CE) and automotive standards (SAE J1113-25) or for biological experiments. The advantage of these TEM-cells is that they are open and it is very easy to control the functions of the EUT (Equipment Under Test). The applications are for instance the immunity testing of watches, pagers, telephones or PCB's.

In comparison with other closed TEM-cells, the price is low. The field decreases rapidly outside the open TEM-cells (approx. 33 dB at 1 meter) and it is therefore possible to use an open TEM-cell in ordinary facilities. Another interesting application is the calibration of field probes as the generated field inside the TEM-cell is very exact. TEM-cells are the most precise structures for field calibrations.

Technical specifications	TEM 220	TEM 500	TEM 1000 *	TEM 3000 *
Frequency range	DC - 220 MHz	DC - 500 MHz	DC - 1 GHz	DC - 3 GHz
Height under plate	33.3 cm	14.7 cm	7.3 cm	2.5 cm
Max. input power	1.5 kW	1 kW	750 W	400 W
Maximum field	800 V/m	1.5 kV/m	2.6 kV/m	5.6 kV/m
Field for a 25 W amplifier	105 V/m	215 V/m	480 V/m	1400 V/m
Dimensions (LxWxH)	180 x 160 x 73 cm	97 x 81 x 32cm	54 x 45 x 16.8 cm	44 x 18 x 8 cm
Weight	55 kg	12 kg	3.5 kg	1.1 kg
Field precision	± 5 %			
Connector	type N 50 Ω			
Cell impedance	50 Ω			
Wave impedance	377 Ω			
VSWR	< 1.2 (<1.9 for the TEM3000)			
Options	Signal and power supply filters			
* Can be equipped with a test setup for IC or PCB acc. to SAE J1752-3				

Other models are available on request