A-INFO

LB-28-25
26.5 - 40.0GHz Standard Gain Horn Antenna

Technical Specification

Frequency Range(GHz)	26.5 - 40.0	
Waveguide	WR28	
Gain(dBi)	25 Typ.	
Polarization	Linear	
3dB Beamwidth(deg)	10 Typ.	
VSWR	1.25:1 Typ.	
Output	A2 Type	FBP320(UBR320)
	C2 Type	2.92mm-Female or 2.4mm-Female
Material	Cu	
Size(mm)	A2 Type	71 x 70 x 172
	C2 Type	71 x 70 x 196
Net Weight(Kg)	A2 Type	0.20 Around
	C2 Type	0.25 Around

Outline Drawing (Size: mm)

A2 Type (With FBP320 Output)

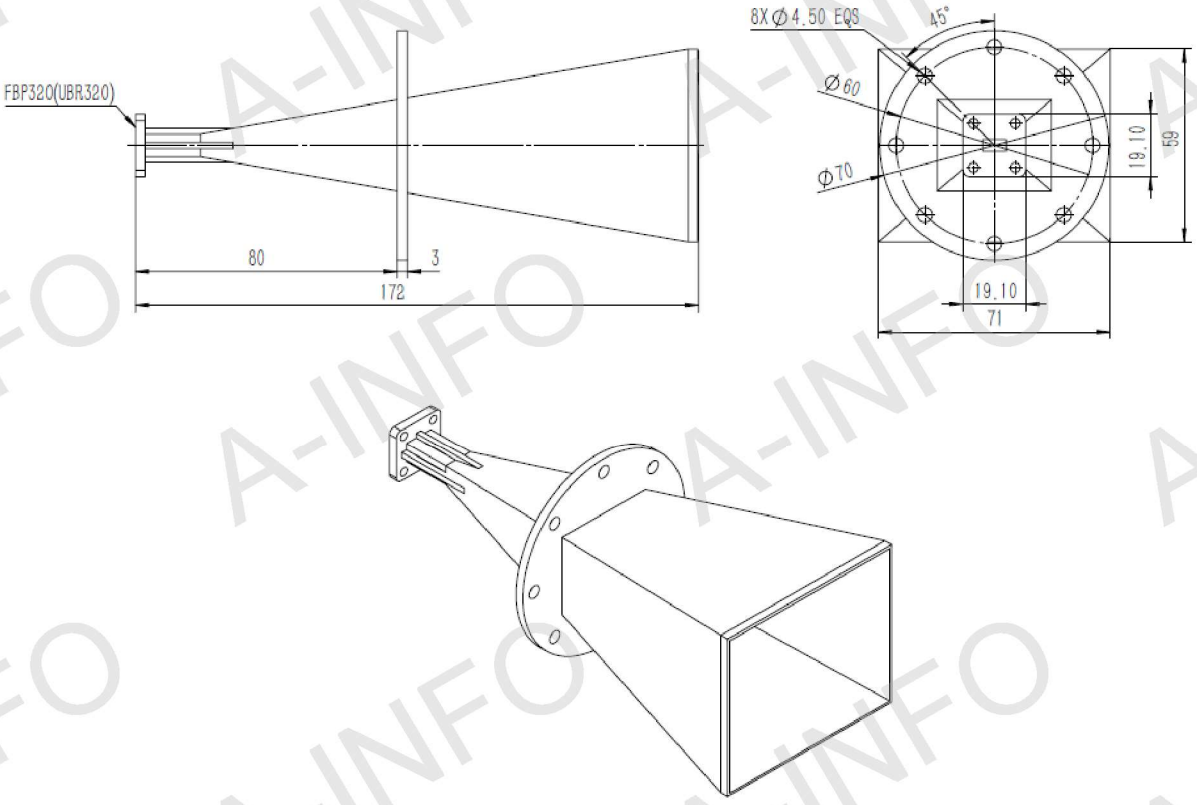

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

A2 Type (With Round Mounting Bracket)

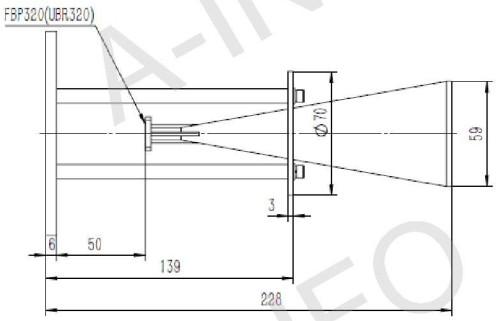



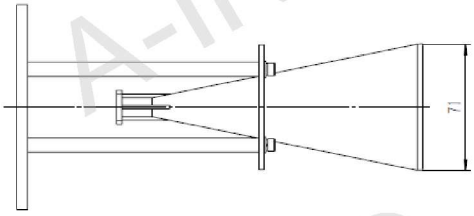

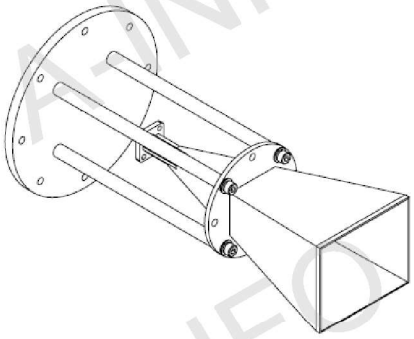

A2 Type (With L Type Mounting Bracket)

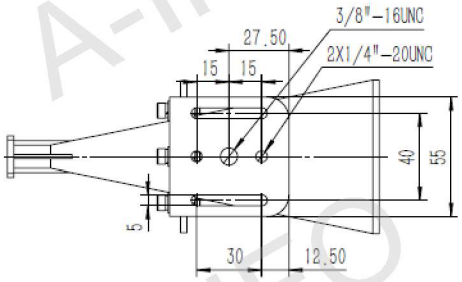



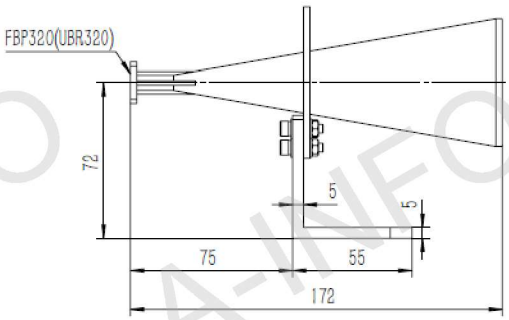

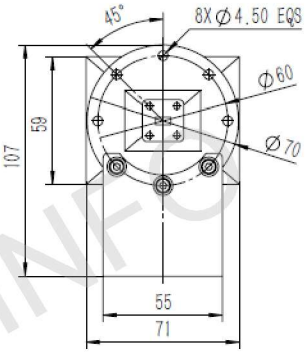

C2 Type (With 2.92mm-Female Output)

For 2.4mm-Female output outline drawing, please contact A-INFO.

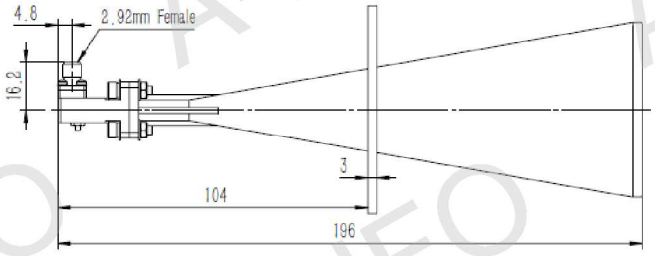



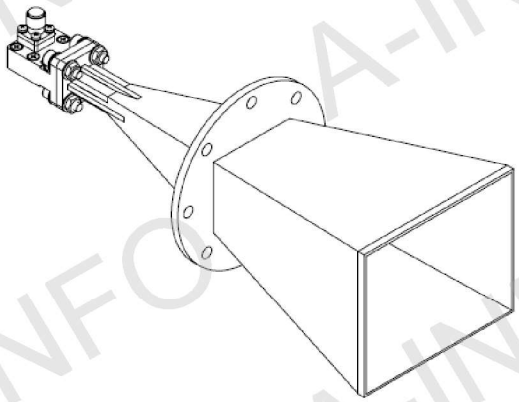

C2 Type (With 2.92mm-Female Output & Round Mounting Bracket)

For 2.4mm-Female output outline drawing, please contact A-INFO.

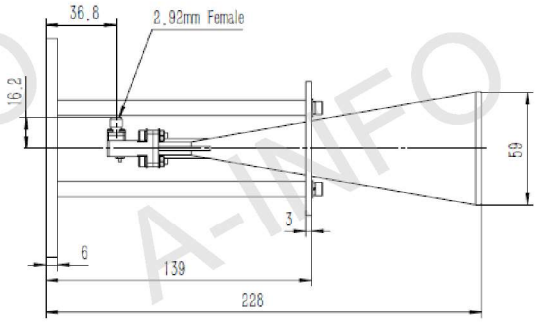



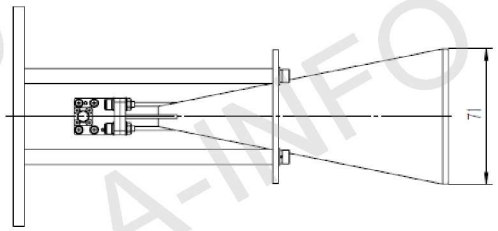

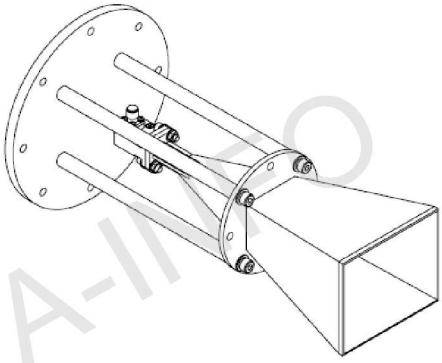

C2 Type (With 2.92mm-Female Output & L Type Mounting Bracket)

For 2.4mm-Female output outline drawing, please contact A-INFO.

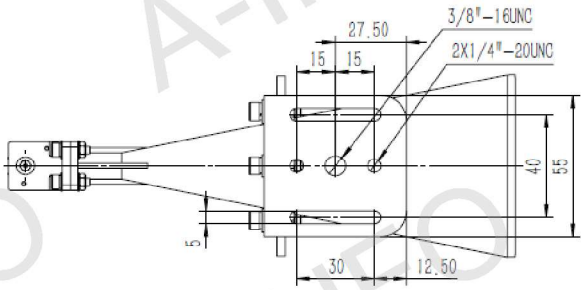

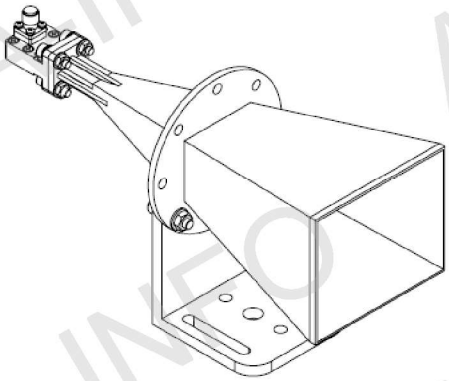

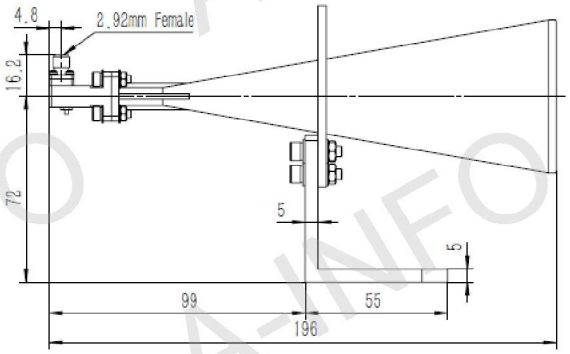

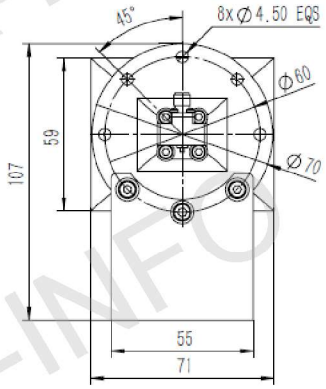

A2 Type (With Radome)

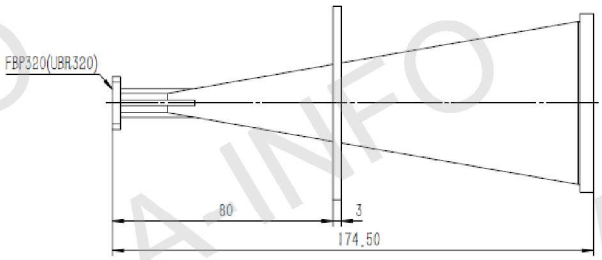

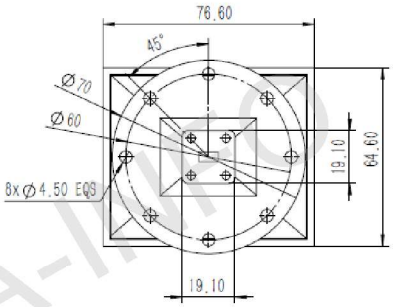

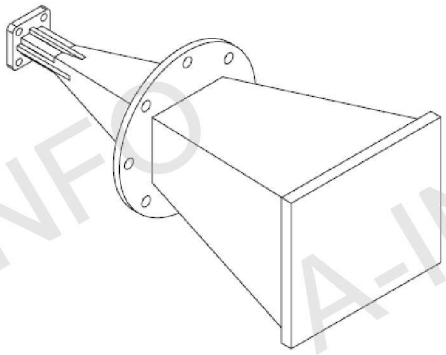

A2 Type (With Round Mounting Bracket & Radome)

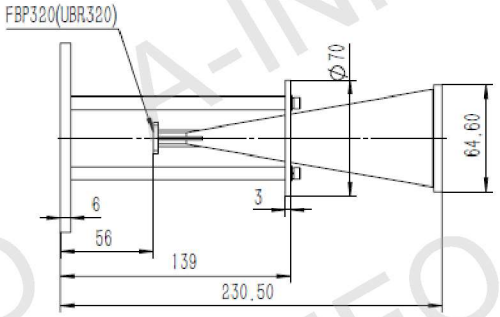



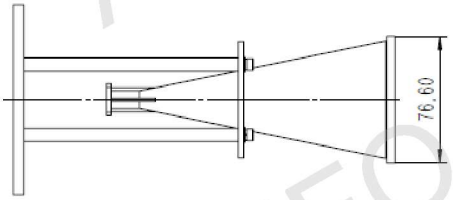

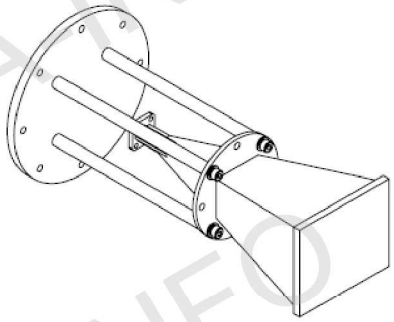

A2 Type (With L Type Mounting Bracket & Radome)

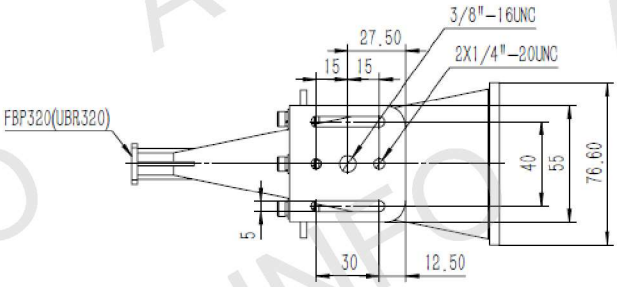



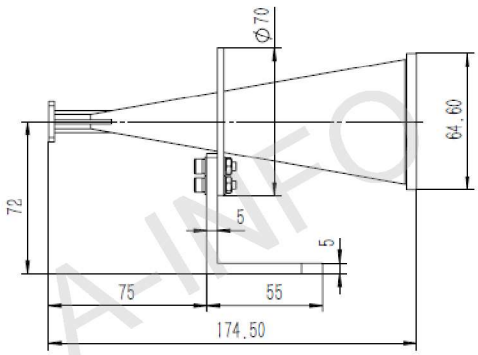

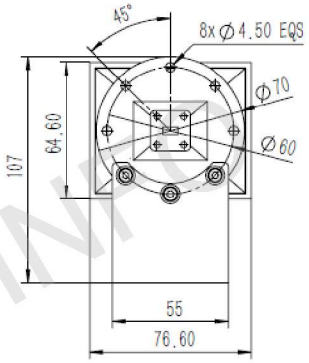

C2 Type (With 2.92mm-Female Output & Radome)

For 2.4mm-Female output outline drawing, please contact A-INFO.

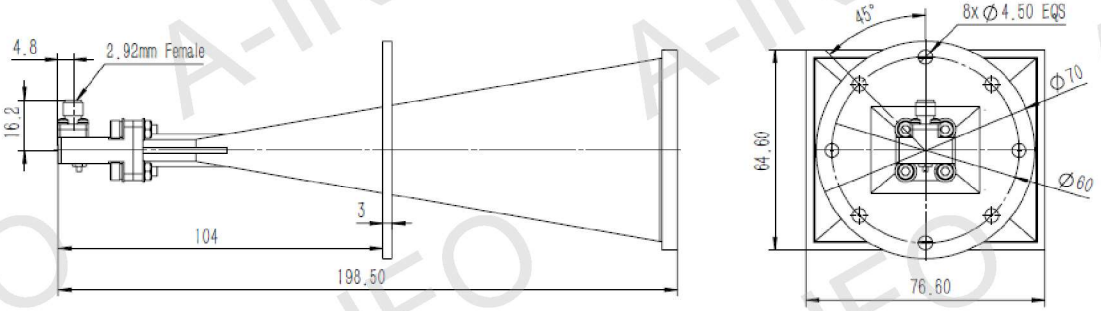

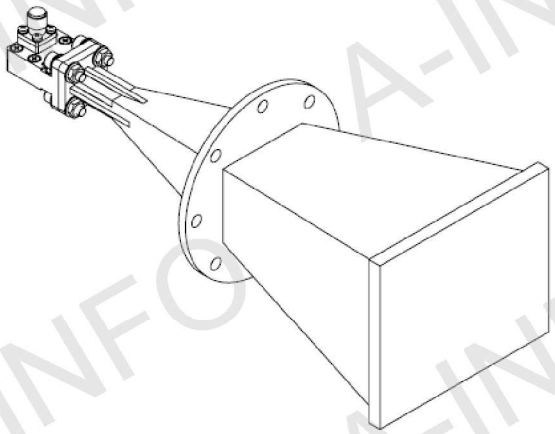

C2 Type (With 2.92mm-Female Output & Round Mounting Bracket & Radome)

For 2.4mm-Female output outline drawing, please contact A-INFO.

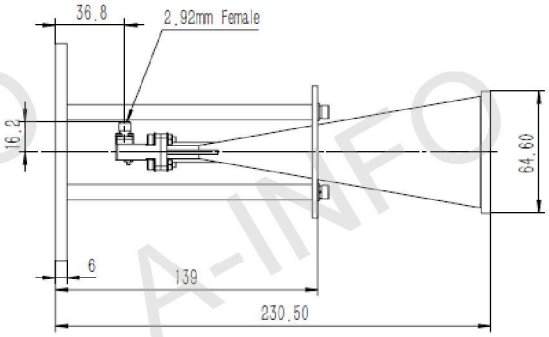



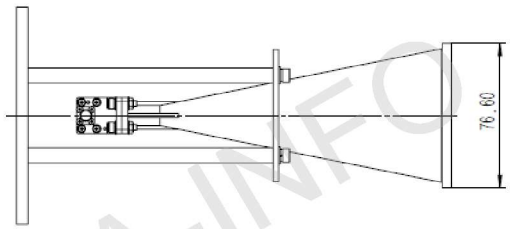

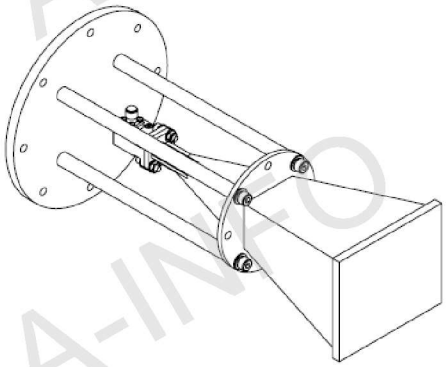

C2 Type (With 2.92mm-Female Output & L Type Mounting Bracket & Radome)

For 2.4mm-Female output outline drawing, please contact A-INFO.

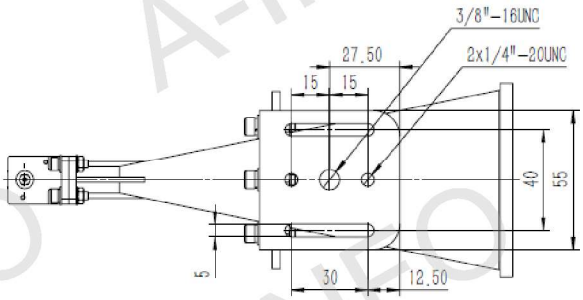

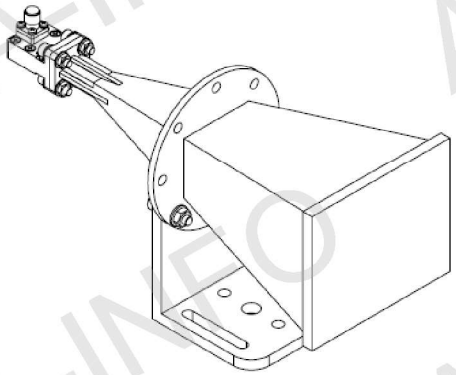

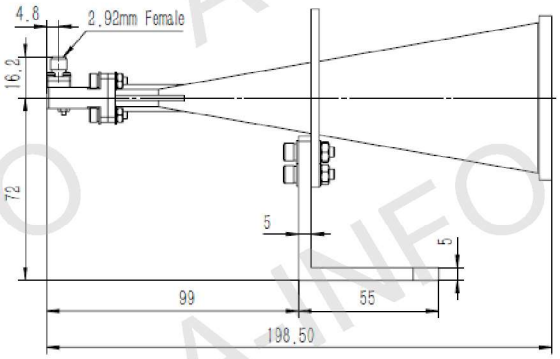

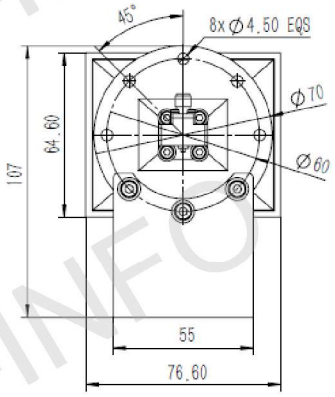

Flange Drawing (Size: mm)

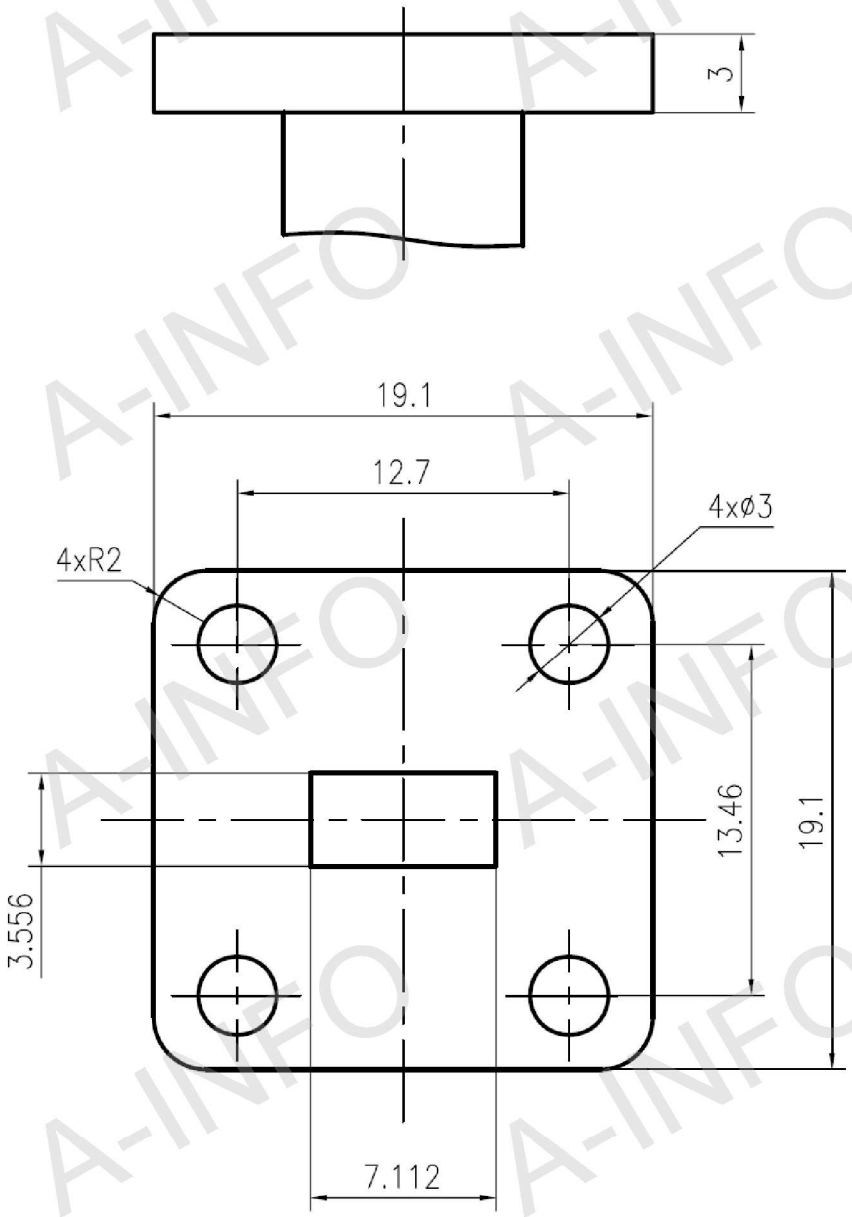

FBP320

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

Test Results

1. Gain and Antenna Factor

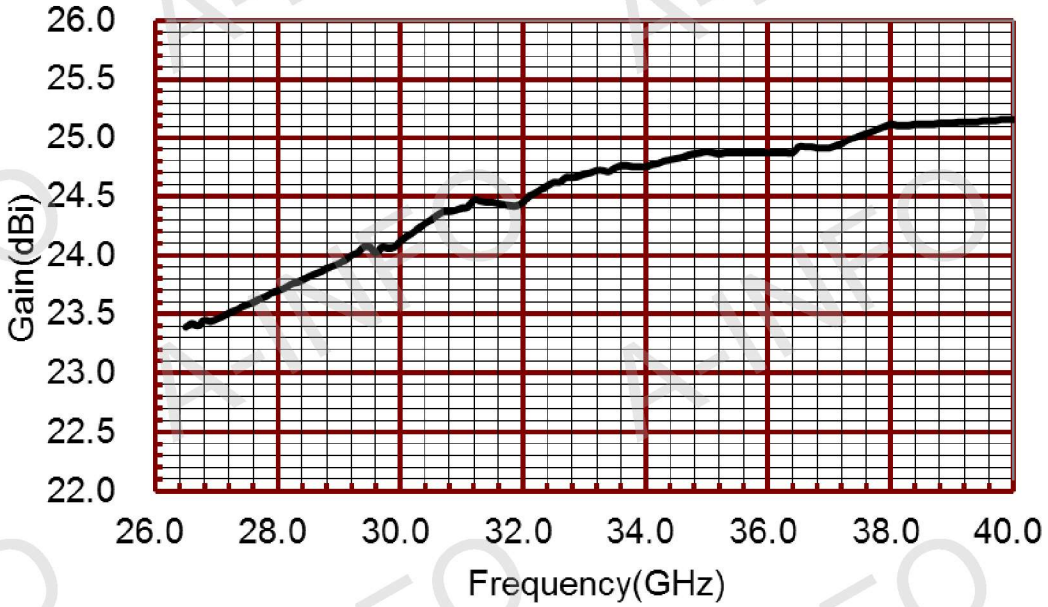

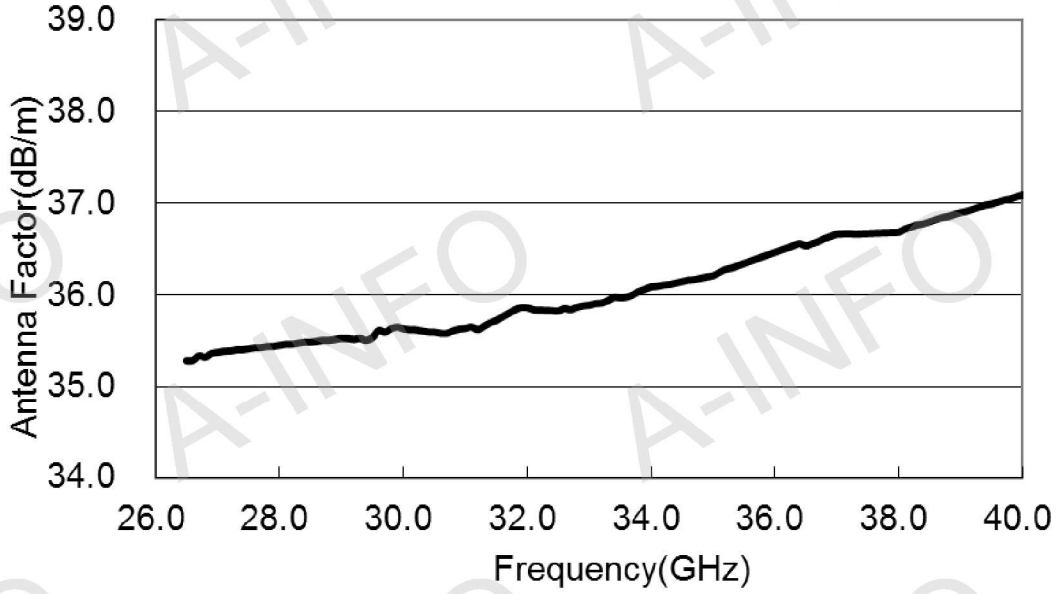

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

Frequency (GHz)	Gain (dB)	Antenna Factor (dB/m)
26.50	23.39	35.28
27.00	23.46	35.38
27.50	23.58	35.42
28.00	23.70	35.45
28.50	23.82	35.49
29.00	23.93	35.53
29.50	24.07	35.54
30.00	24.12	35.63
30.50	24.30	35.60
31.00	24.40	35.64
31.50	24.45	35.73
32.00	24.45	35.86
32.50	24.62	35.83
33.00	24.69	35.89

Frequency (GHz)	Gain (dB)	Antenna Factor (dB/m)
33.50	24.74	35.97
34.00	24.75	36.09
34.50	24.82	36.15
35.00	24.88	36.21
35.50	24.87	36.34
36.00	24.87	36.47
36.50	24.92	36.54
37.00	24.91	36.66
37.50	25.02	36.67
38.00	25.12	36.69
38.50	25.12	36.80
39.00	25.13	36.90
39.50	25.15	36.99
40.00	25.16	37.09

2. VSWR

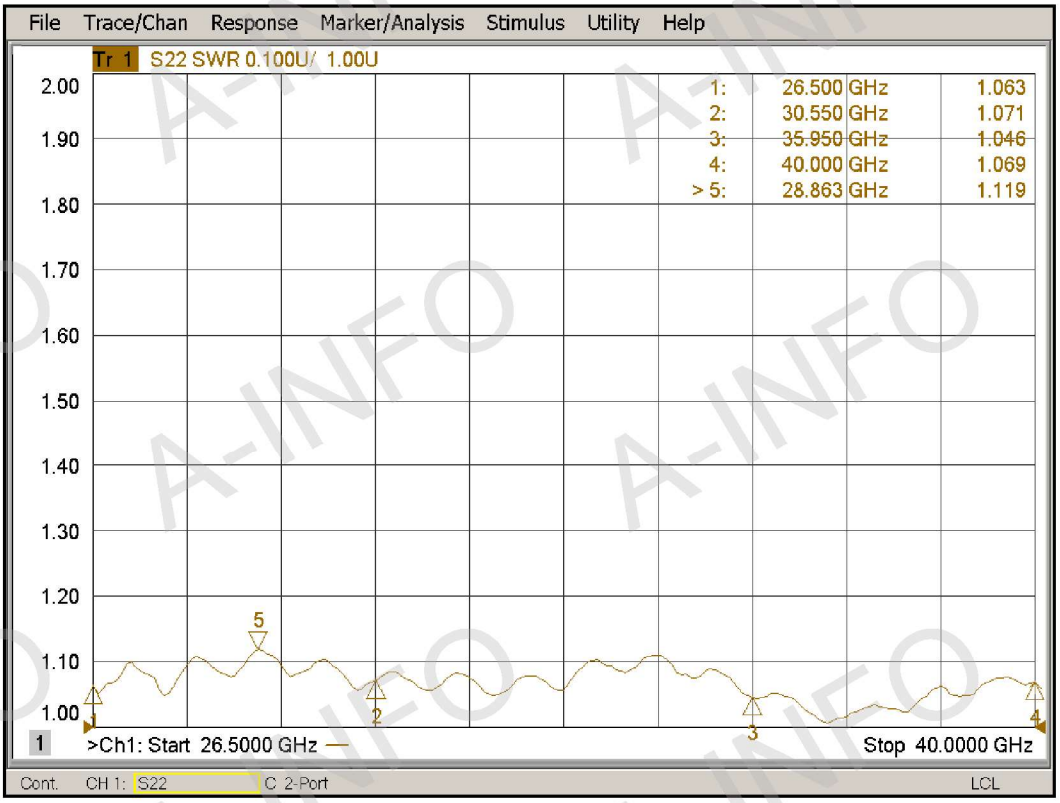

3. Cross Polarization Isolation

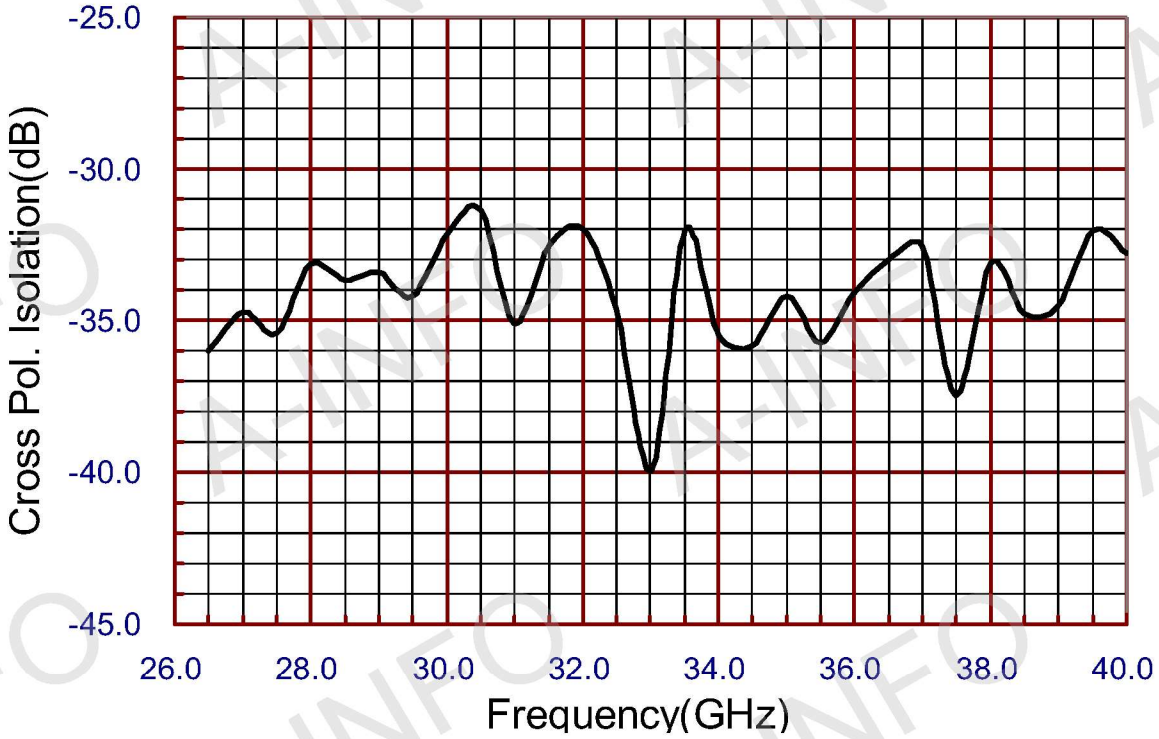

4. Pattern

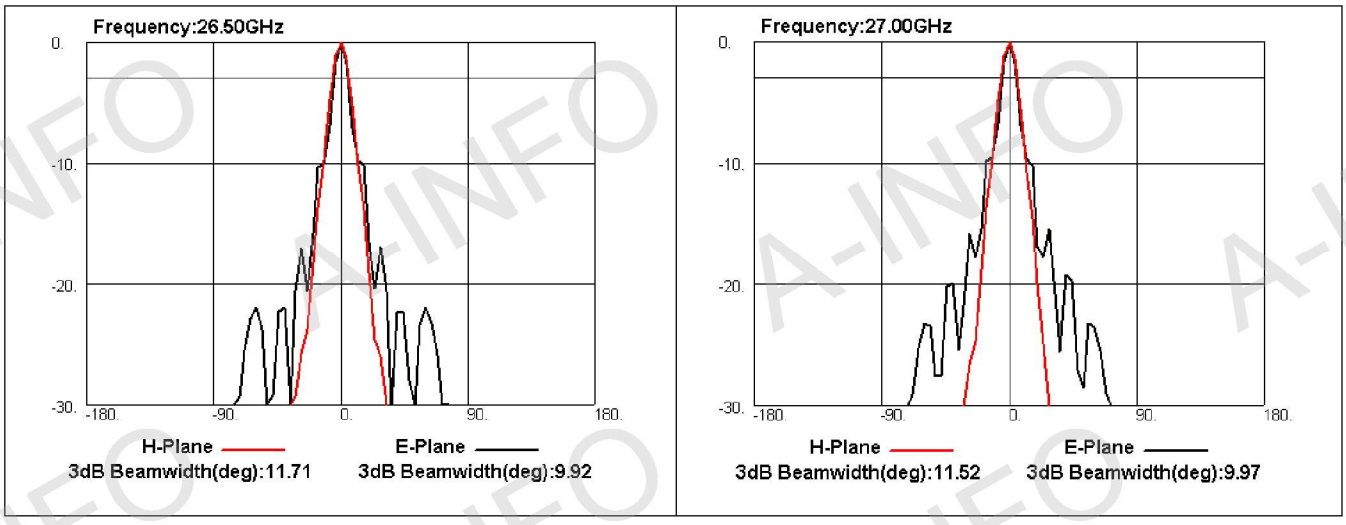

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

A-INFO

LB-28-25

26.5 - 40.0GHz Standard Gain Horn Antenna

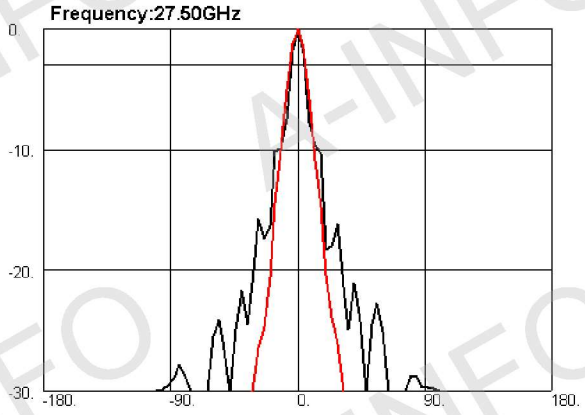

H-Plane 3dB Beamwidth(deg):11.24

E-Plane 3dB Beamwidth(deg):9.53

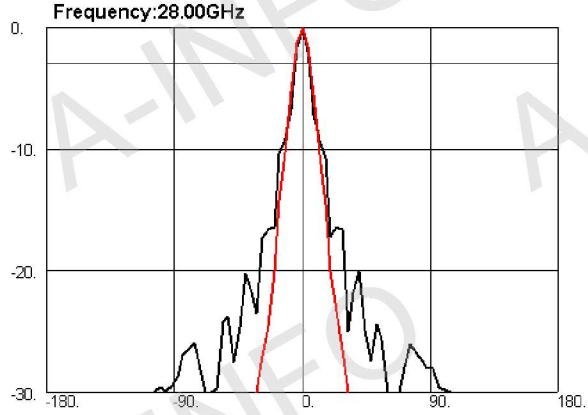

H-Plane 3dB Beamwidth(deg):11.11

E-Plane 3dB Beamwidth(deg):9.76

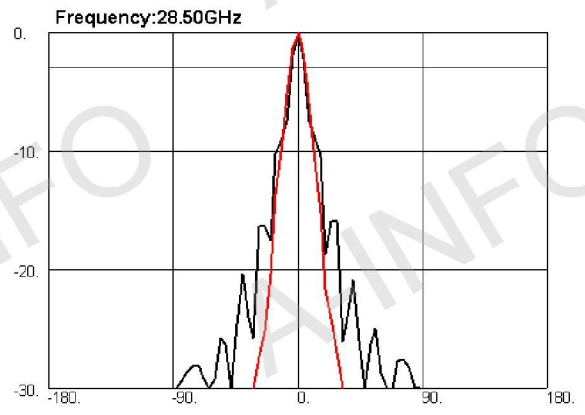

H-Plane 3dB Beamwidth(deg):10.97

E-Plane 3dB Beamwidth(deg):9.34

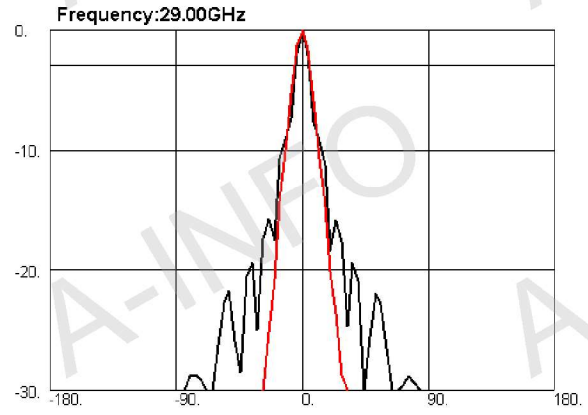

H-Plane 3dB Beamwidth(deg):10.90

E-Plane 3dB Beamwidth(deg):9.41

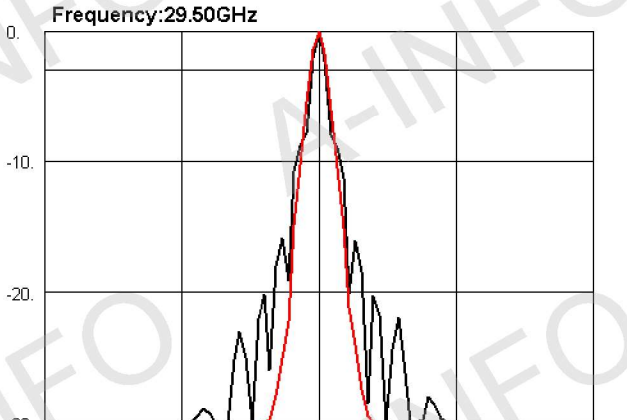

H-Plane 3dB Beamwidth(deg):10.81

E-Plane 3dB Beamwidth(deg):9.11

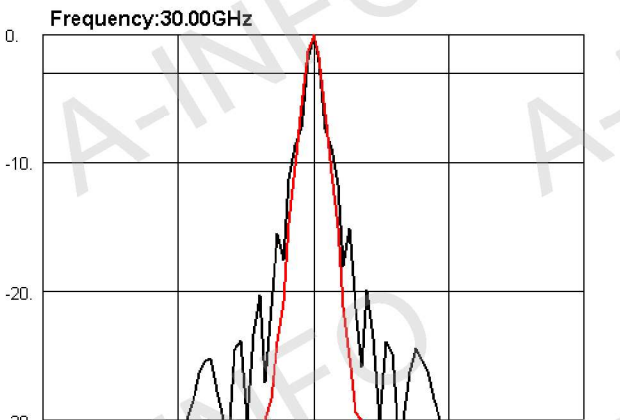

H-Plane 3dB Beamwidth(deg):10.75

E-Plane 3dB Beamwidth(deg):9.47

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

A-INFO

LB-28-25

26.5 - 40.0GHz Standard Gain Horn Antenna

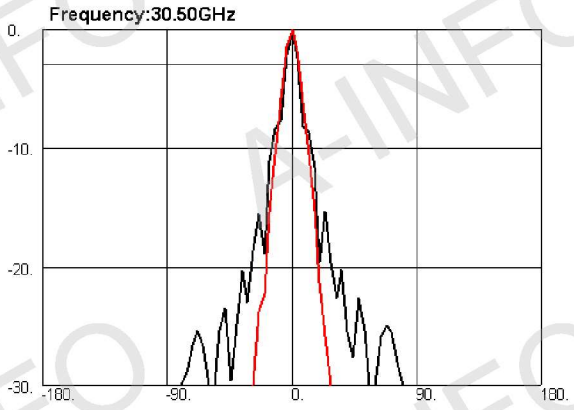

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.47 3dB Beamwidth(deg):9.01

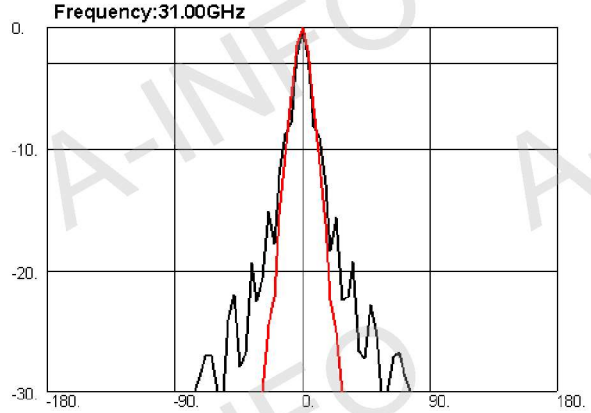

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.35 3dB Beamwidth(deg):8.98

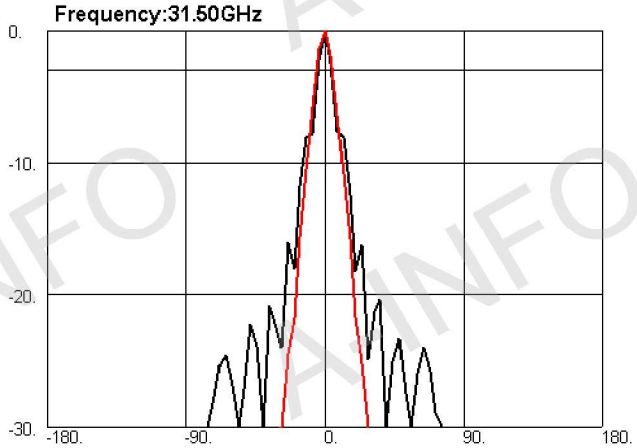

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.39 3dB Beamwidth(deg):8.95

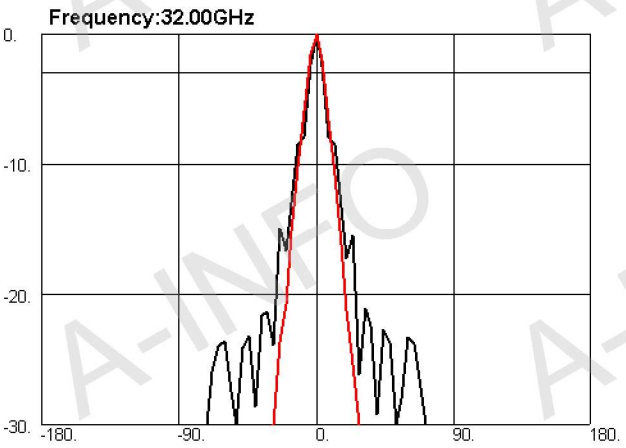

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.15 3dB Beamwidth(deg):8.85

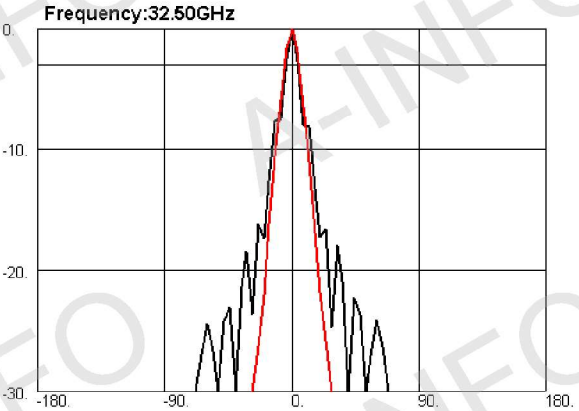

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.27 3dB Beamwidth(deg):8.68

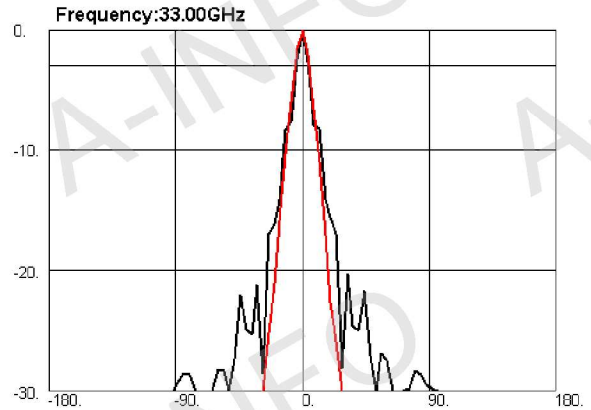

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.11 3dB Beamwidth(deg):8.64

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

A-INFO

LB-28-25

26.5 - 40.0GHz Standard Gain Horn Antenna

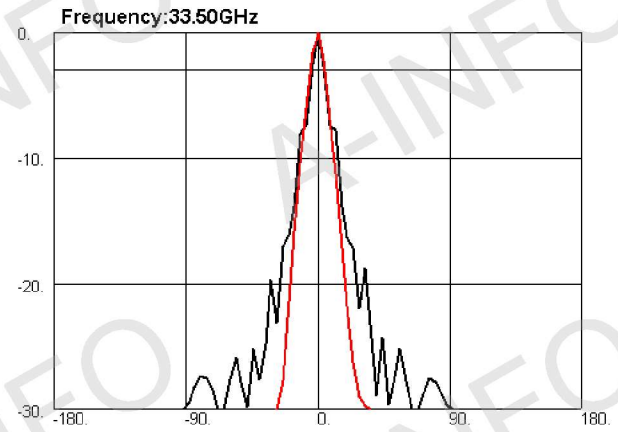

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):9.94 3dB Beamwidth(deg):8.61

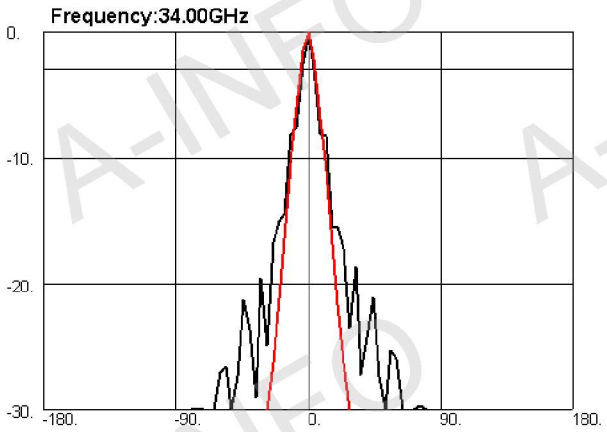

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.01 3dB Beamwidth(deg):8.43

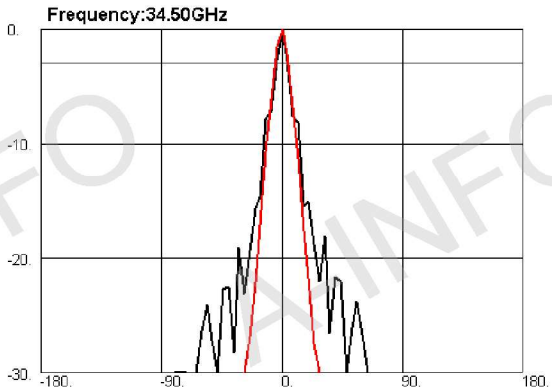

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):9.94 3dB Beamwidth(deg):8.39

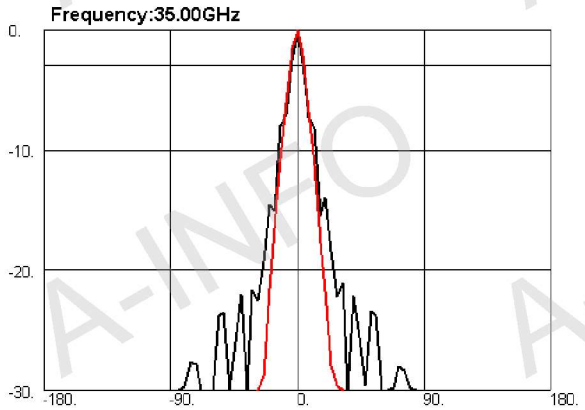

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):10.00 3dB Beamwidth(deg):8.55

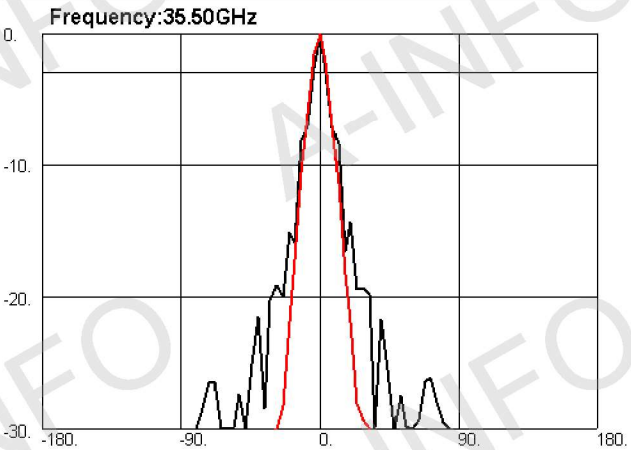

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):9.91 3dB Beamwidth(deg):8.31

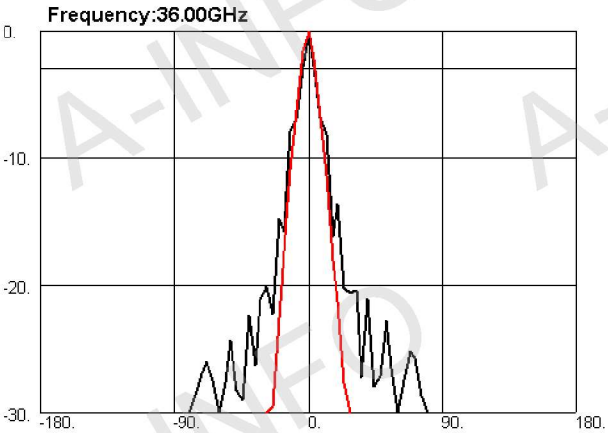

H-Plane ——— E-Plane ———

3dB Beamwidth(deg):9.90 3dB Beamwidth(deg):8.33

A-INFO

LB-28-25

26.5 - 40.0GHz Standard Gain Horn Antenna

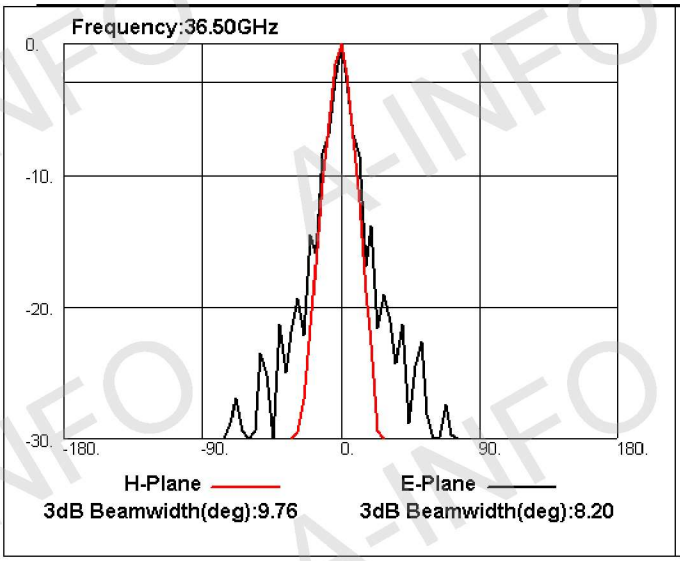

3dB Beamwidth(deg):9.76 3dB Beamwidth(deg):8.20

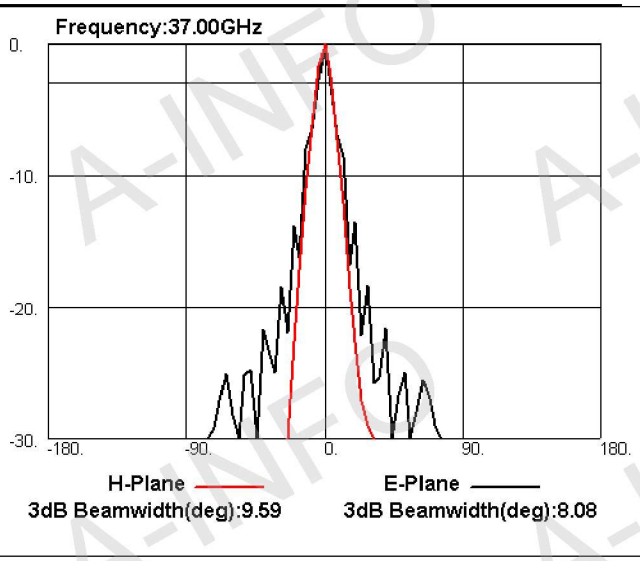

3dB Beamwidth(deg):9.59 3dB Beamwidth(deg):8.08

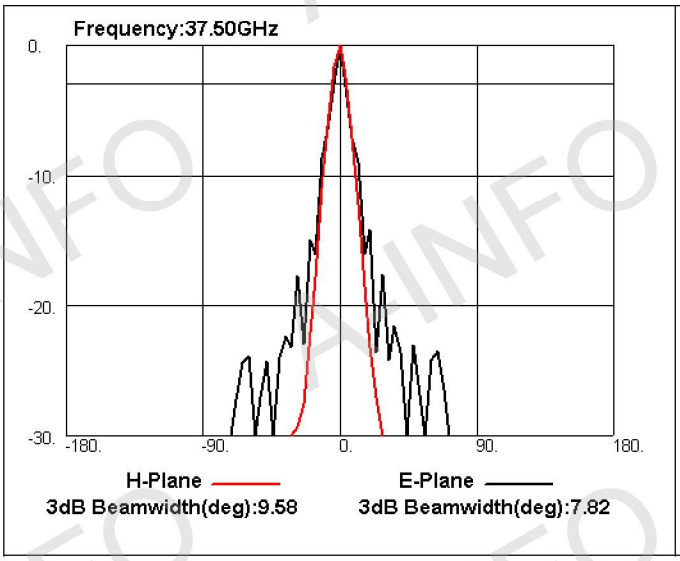

3dB Beamwidth(deg):9.58 3dB Beamwidth(deg):7.82

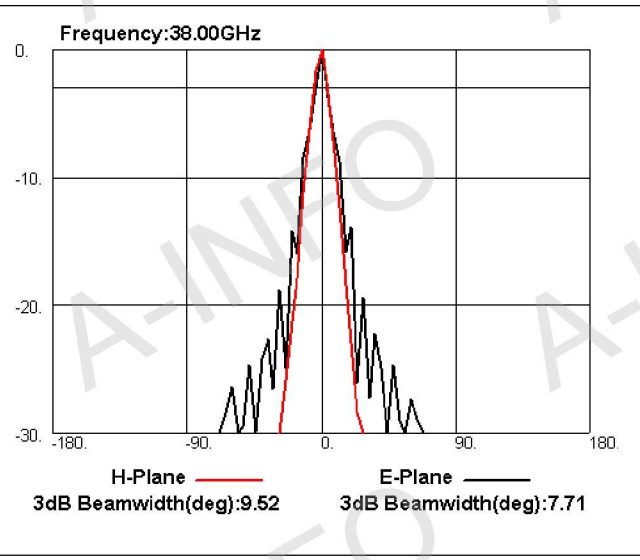

3dB Beamwidth(deg):9.52 3dB Beamwidth(deg):7.71

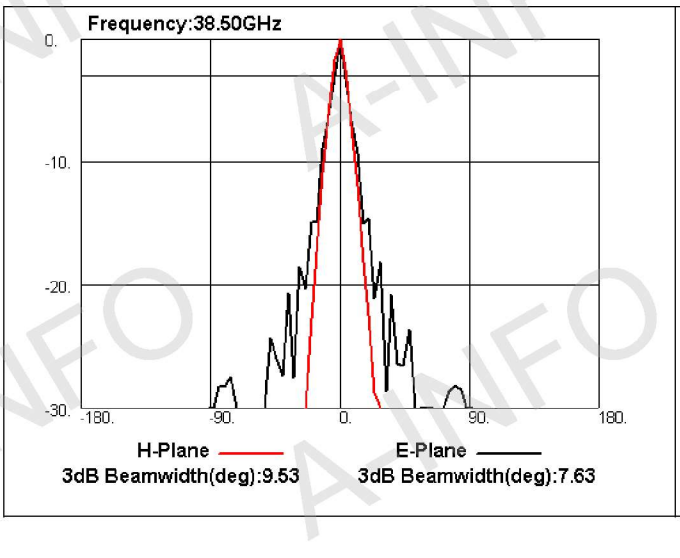

3dB Beamwidth(deg):9.53 3dB Beamwidth(deg):7.63

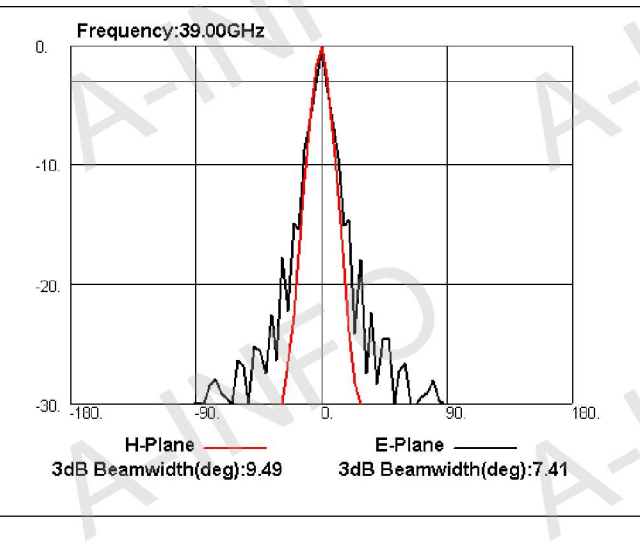

3dB Beamwidth(deg):9.49 3dB Beamwidth(deg):7.41

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com

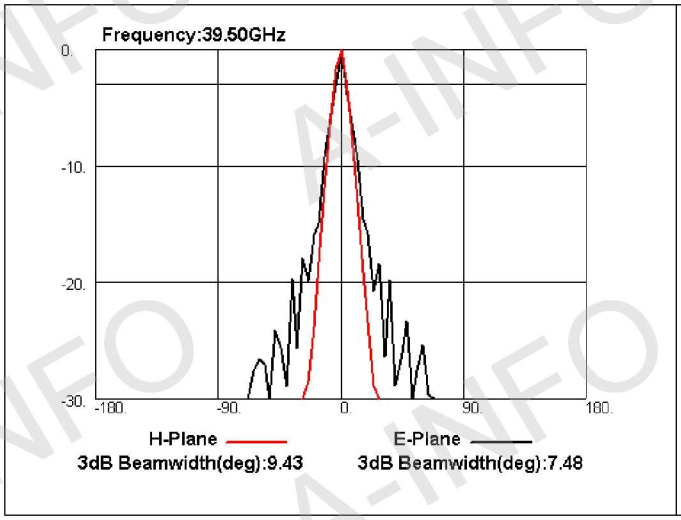

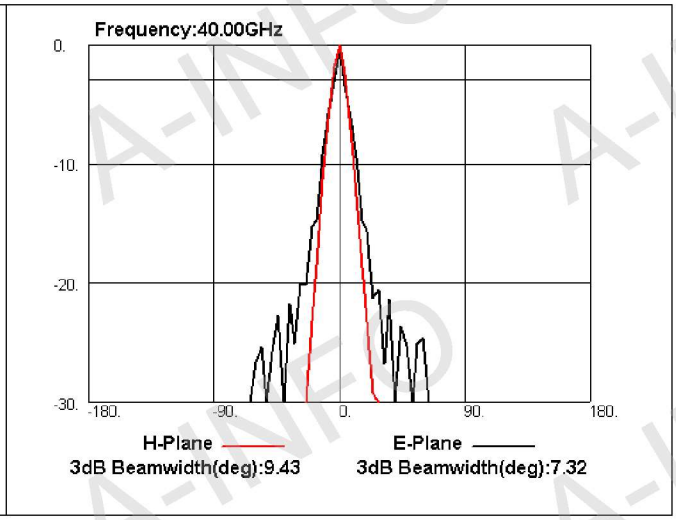

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com