Technical Specification

Frequency Range(GHz)	0.5 - 6.0	
Gain(dBi)	11 Typ.	
Polarization	Linear	
3dB Beamwidth(deg)	E Plane:	97 - 34
	H Plane:	75 - 33
Cross Pol. Isolation(dB)	25 Typ.	
VSWR	1.5:1 Typ.	
Connector	N-Female	
Power Handling(W)	500 Max. CW	
Material	Al	
Size(mm)	435 x 288 x 348	
Net Weight(Kg)	6.8 Around	

Outline Drawing (Size: mm)

N-Female Output

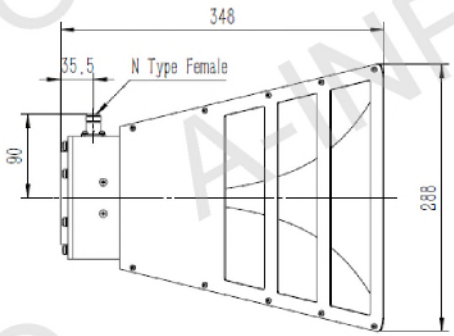

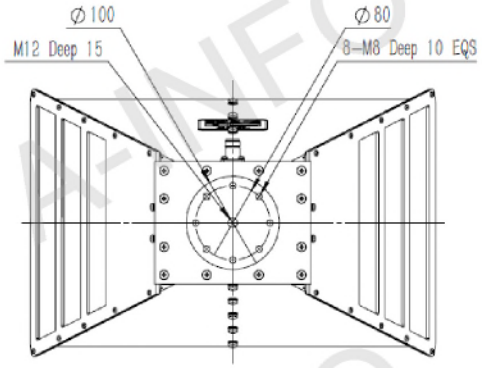

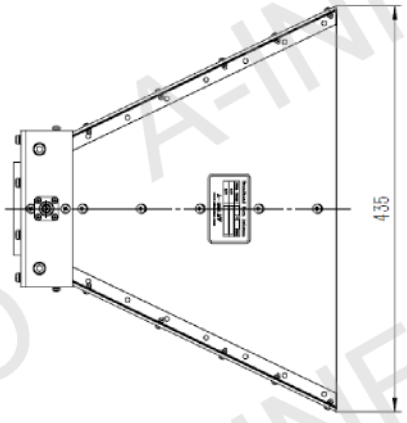

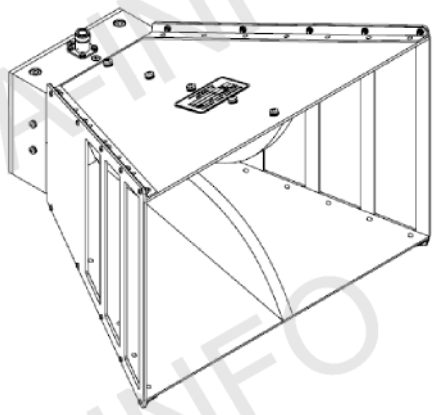

N-Female Output with L type mounting bracket

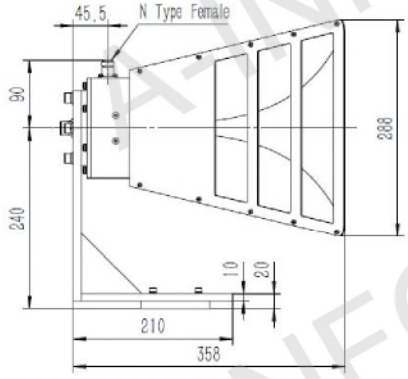

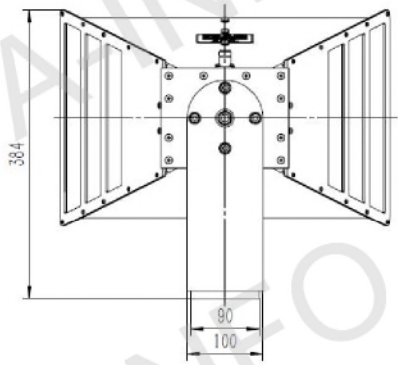

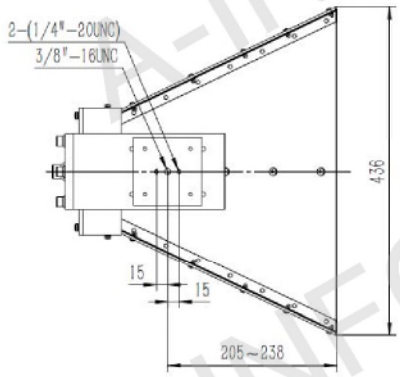

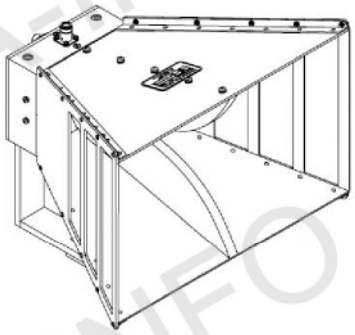

N-Female Output with Radome

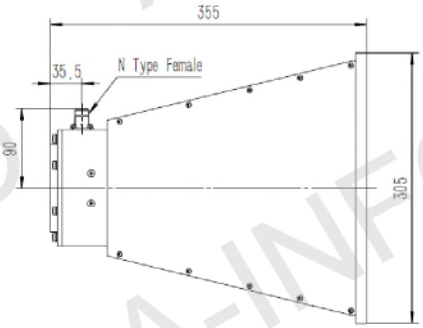

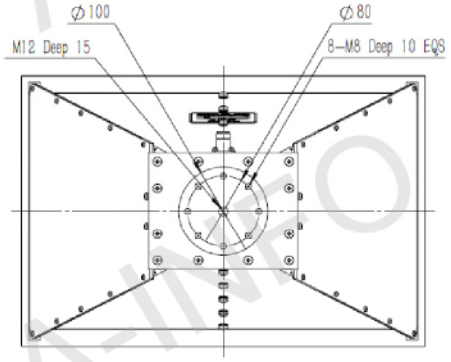

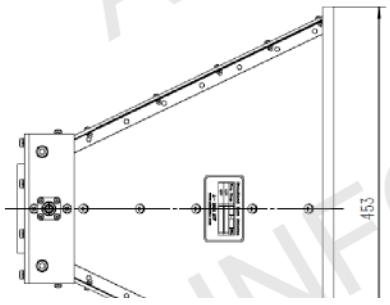

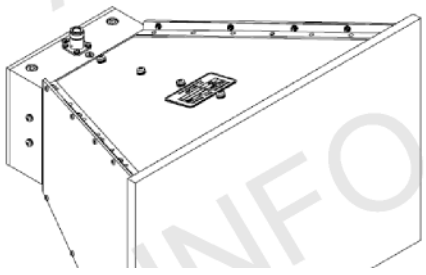

N-Female Output with L type mounting bracket & Radome

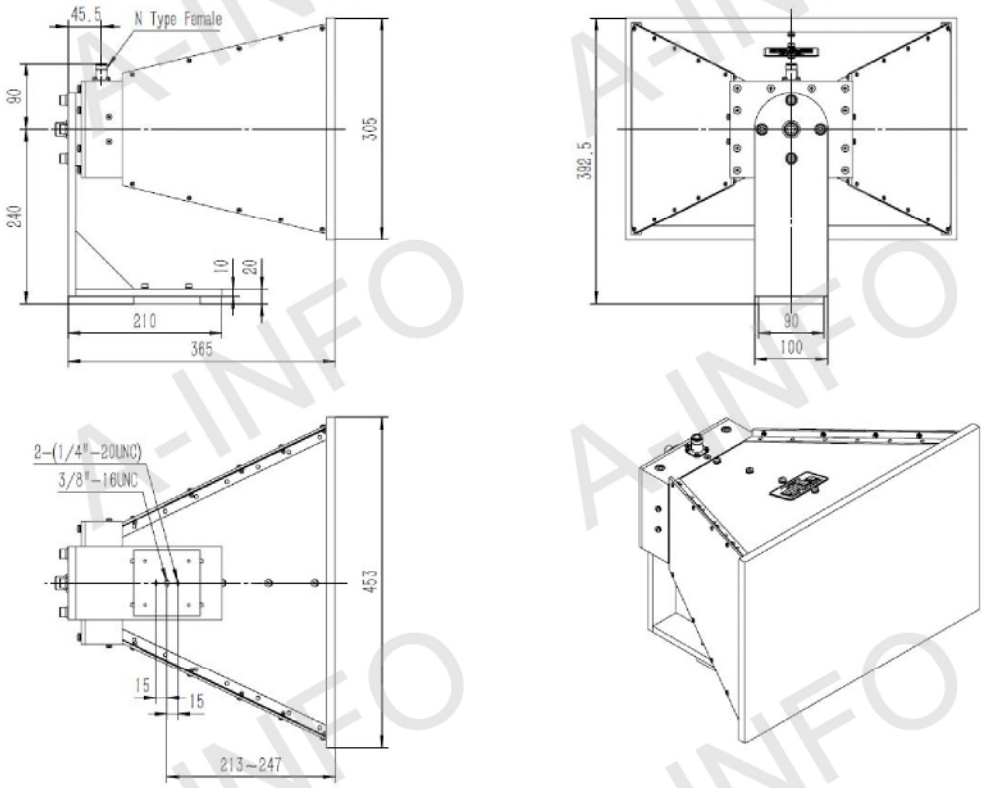

A-INFO

Test Results

1. Gain

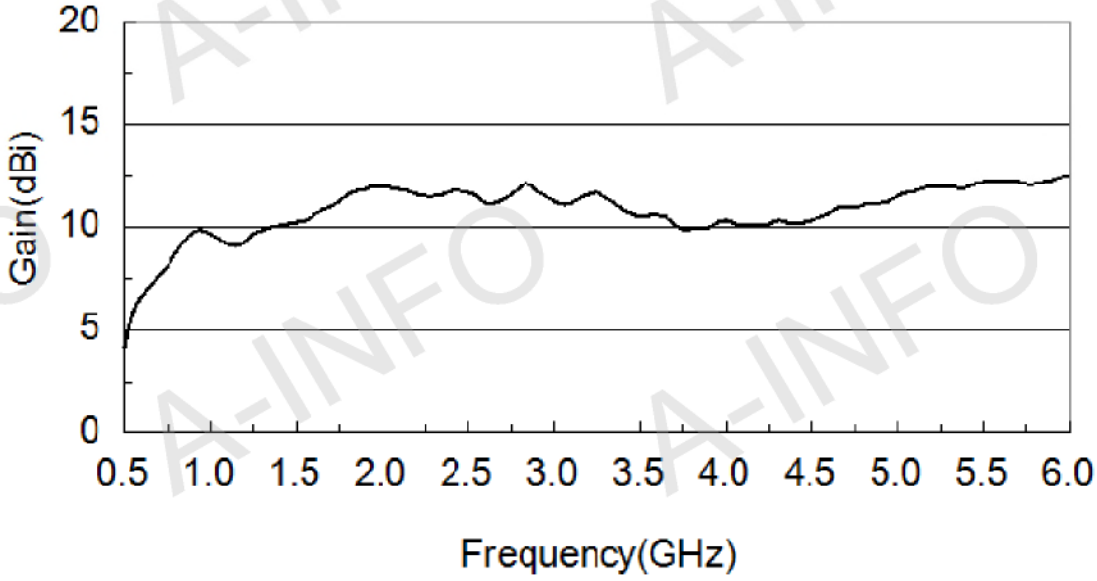

2. Antenna Factor

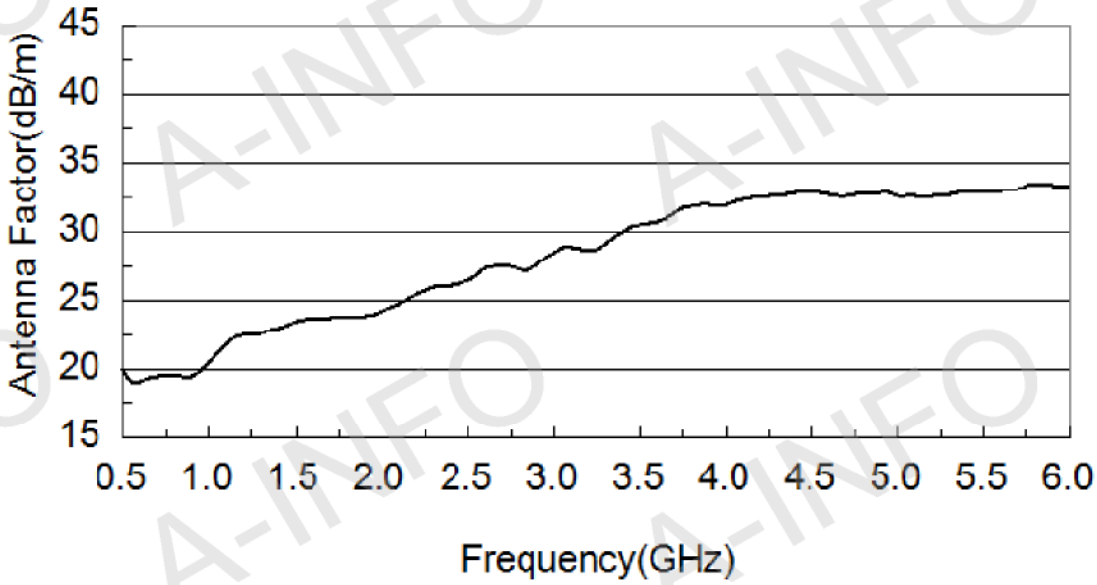

Distributed by: Reliant EMC LLC, Tel. +408-320-9644/+408-916-5750, www.reliantemc.com

3. Cross Polarization Isolation

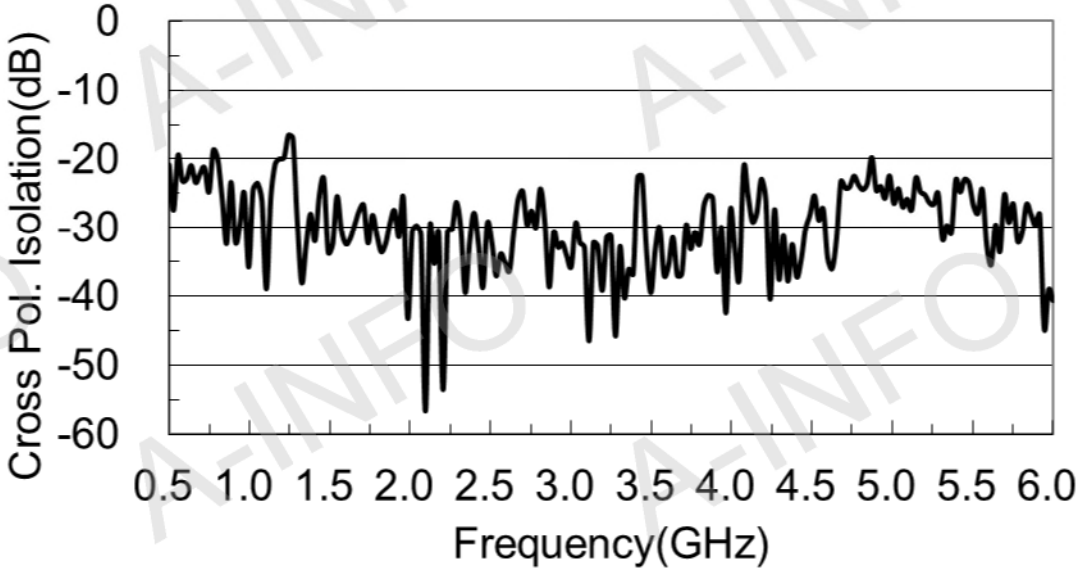

4. VSWR

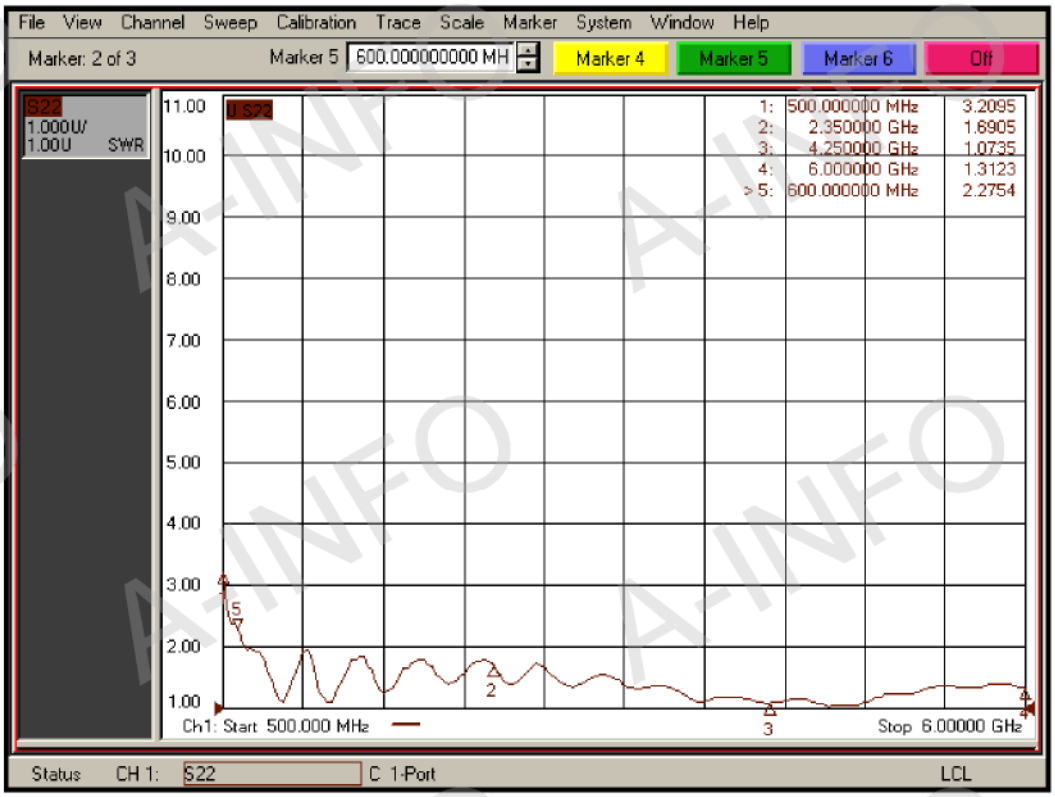

5. Pattern

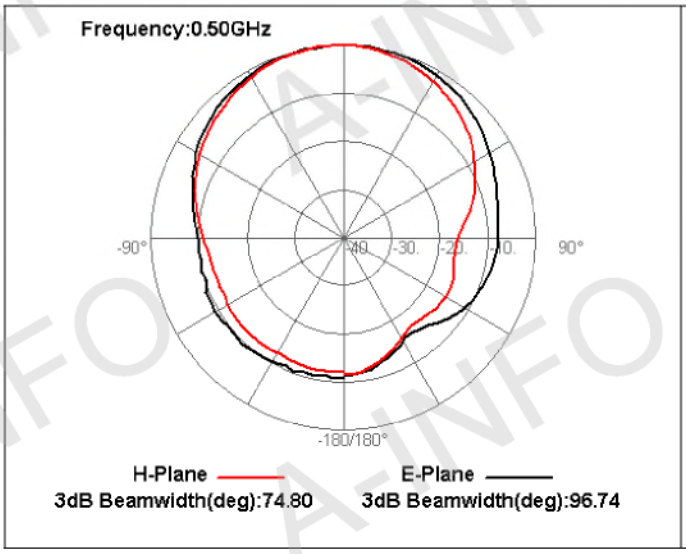
Frequency:0.50GHz
-90°
90°
-40.
-30.
-20.
-10.
-180/180°
H-Plane
3dB Beamwidth(deg):74.80
E-Plane
3dB Beamwidth(deg):96.74

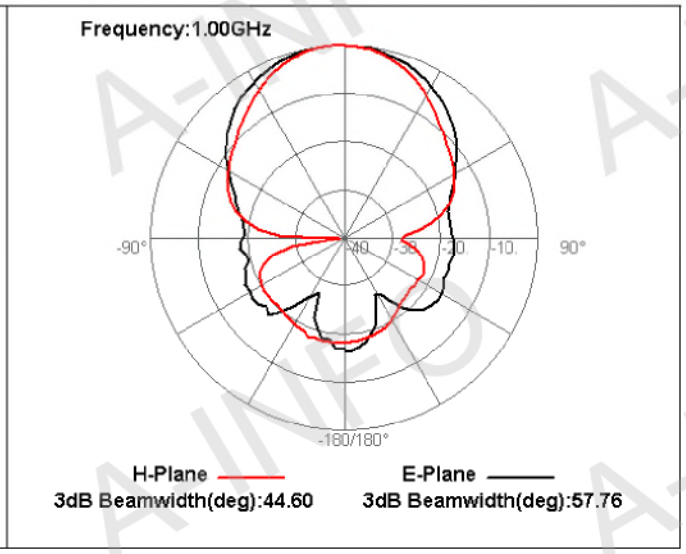
Frequency:1.00GHz
-90°
90°
-40.
-30.
-20.
-10.
-180/180°
H-Plane
3dB Beamwidth(deg):44.60
E-Plane
3dB Beamwidth(deg):57.76

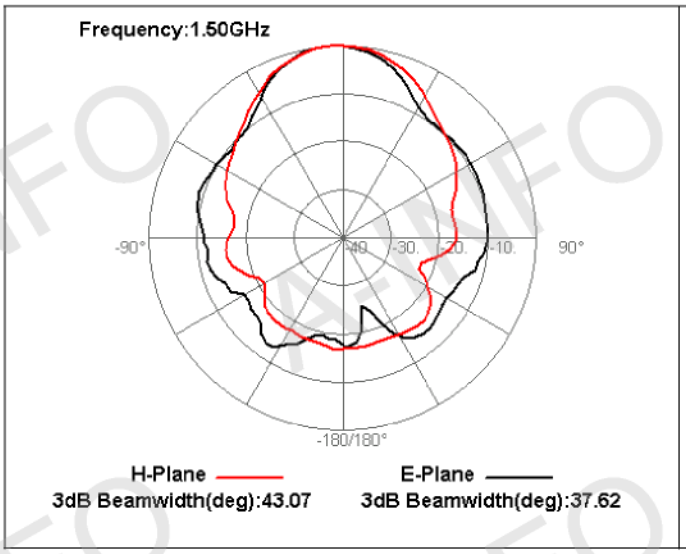
Frequency:1.50GHz
-90°
90°
-40.
-30.
-20.
-10.
-180/180°
H-Plane
3dB Beamwidth(deg):43.07
E-Plane
3dB Beamwidth(deg):37.62

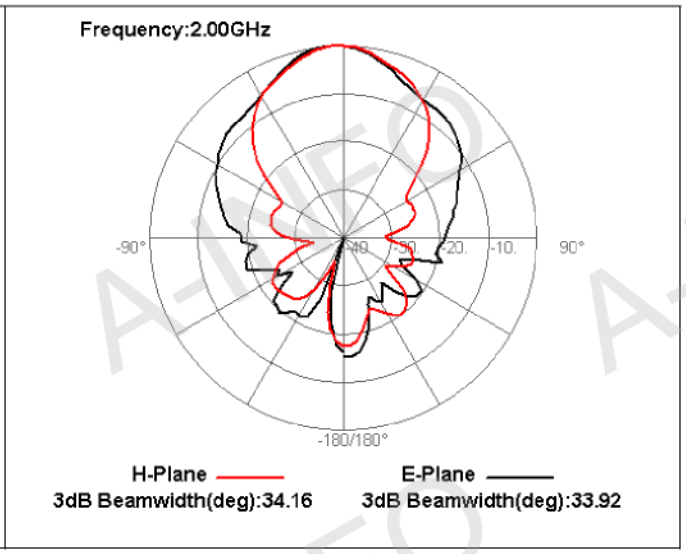
Frequency:2.00GHz
-90°
90°
-40.
-30.
-20.
-10.
-180/180°
H-Plane
3dB Beamwidth(deg):34.16
E-Plane
3dB Beamwidth(deg):33.92

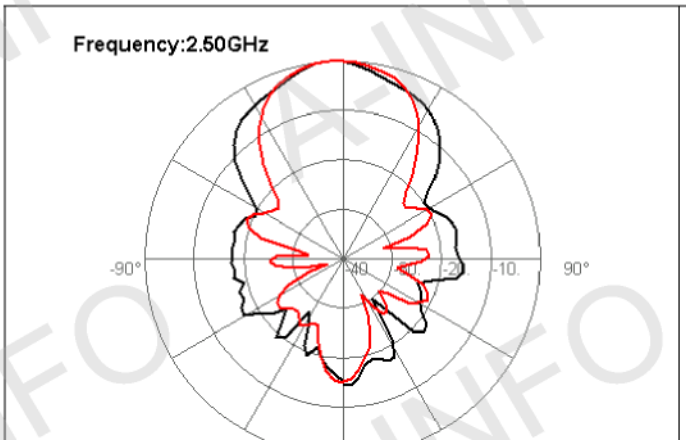
Frequency:2.50GHz
-90°
90°
-40.
-30.
-20.
-10.

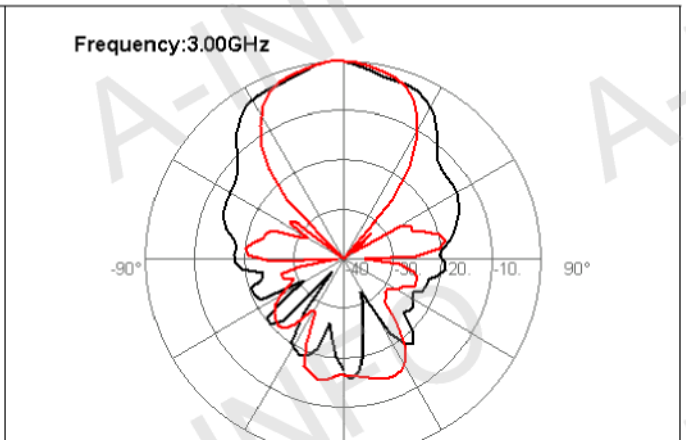
Frequency:3.00GHz
-90°
90°
-40.
-30.
-20.
-10.

Frequency:3.50GHz

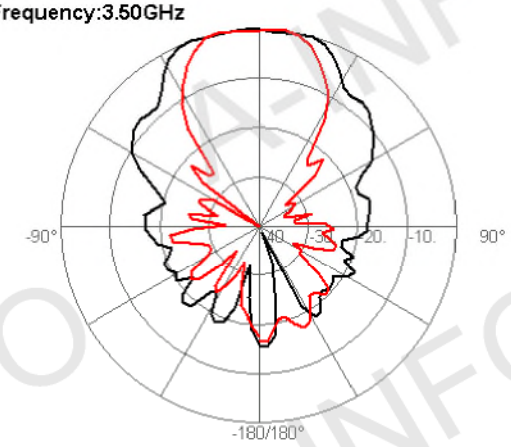

H-Plane
3dB Beamwidth(deg):39.16

E-Plane
3dB Beamwidth(deg):55.34

Frequency:4.00GHz

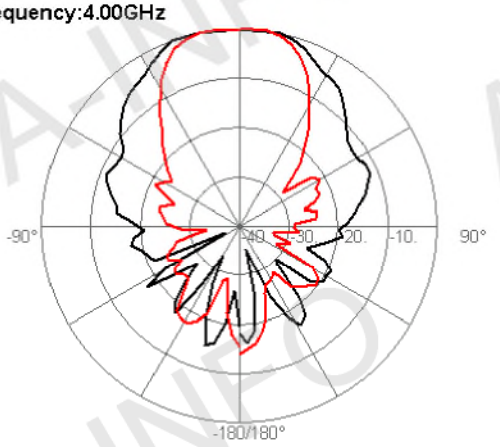

H-Plane
3dB Beamwidth(deg):41.30

E-Plane
3dB Beamwidth(deg):52.53

Frequency:4.50GHz

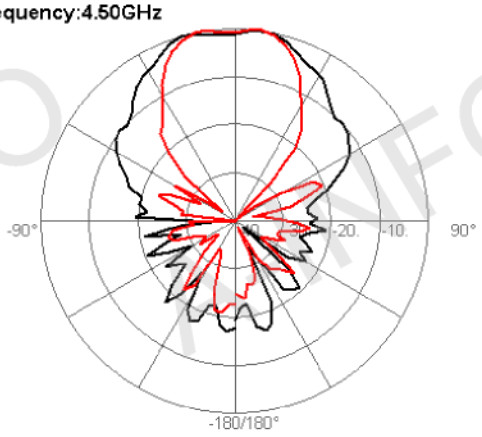

H-Plane
3dB Beamwidth(deg):38.64

E-Plane
3dB Beamwidth(deg):47.34

Frequency:5.00GHz

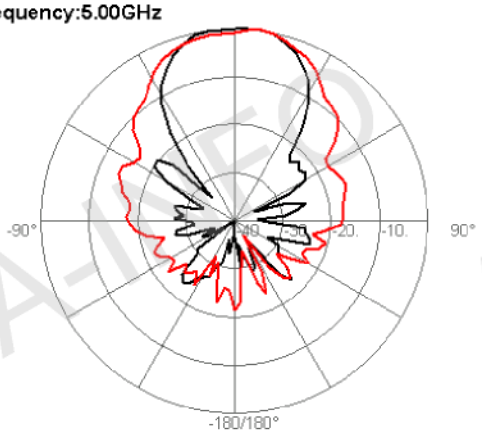

H-Plane
3dB Beamwidth(deg):46.08

E-Plane
3dB Beamwidth(deg):39.48

Frequency:5.50GHz

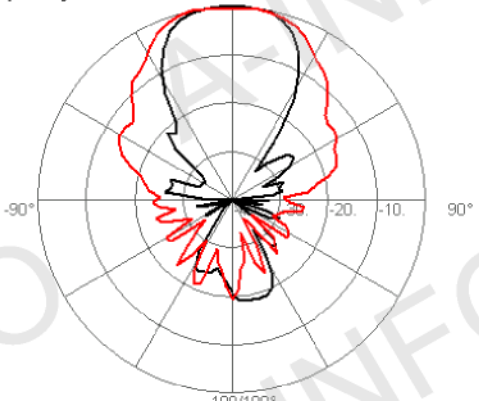
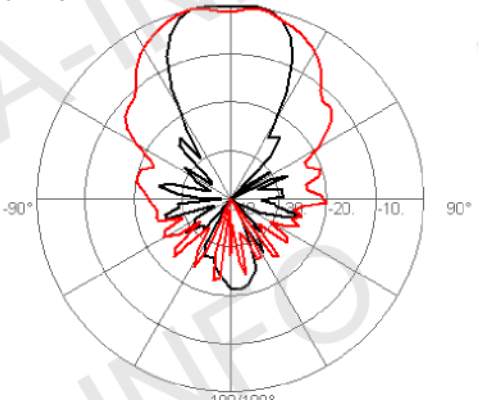
Frequency:6.00GHz