Technical Specification

Frequency Range(GHz)	2.0 – 20.0
Gain(dBi)	16 Typ.
Polarization	Dual Pol.
3dB Beamwidth(deg)	86 - 9
Cross Pol. Isolation(dB)	30 Typ.
	20 Min.
Port to Port Isolation(dB)	40 Typ.
	30 Min.
VSWR	2.0:1 Typ.
	3.0:1 Max.
Output	SMA-Female or N-Female
Power Handling(W CW)	SMA-Female: 25 Max.
	N-Female: 25 Max.
Material	Al
Size(mm)	124 x 124 x 241
Net Weight(Kg)	0.87 Around

APPROVED PATENT ID:	**ZL202030087714.7**

Outline Drawing (Size: mm)

SMA-Female Output (P/N: LB-CSJ-20200-SF)

For N-Female output outline drawing, please contact A-INFO.

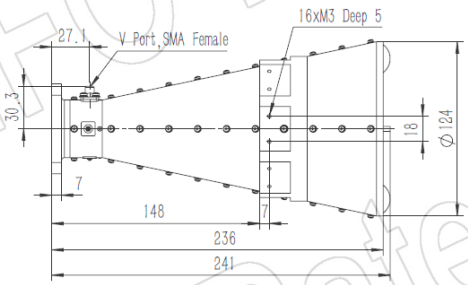



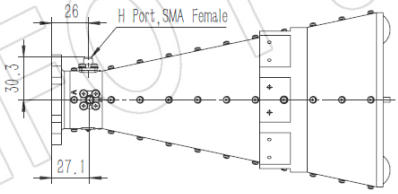



China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

SMA-Female Output with L Type Mounting Bracket (Option, P/N: LB-CSJ-20180-L)

For N-Female output outline drawing, please contact A-INFO.

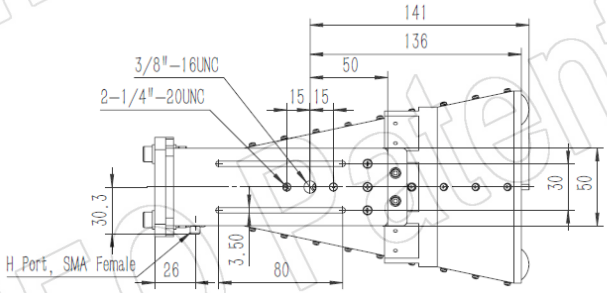

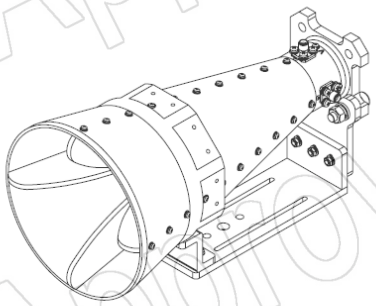

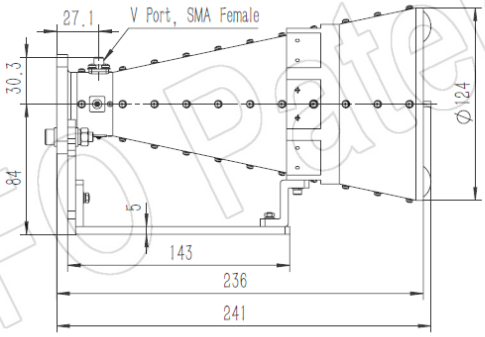



SMA-Female Output with Radome (Option, P/N: LB-CSJ-20200-SFSPO, Outdoor Application)

For N-Female output outline drawing, please contact A-INFO.

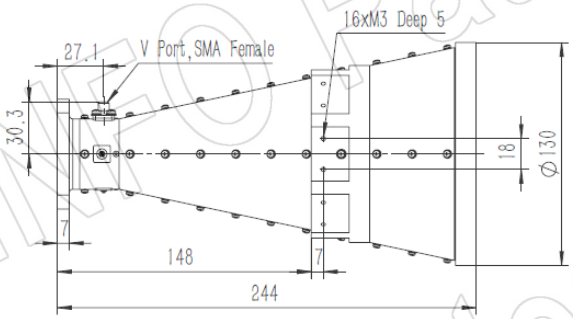

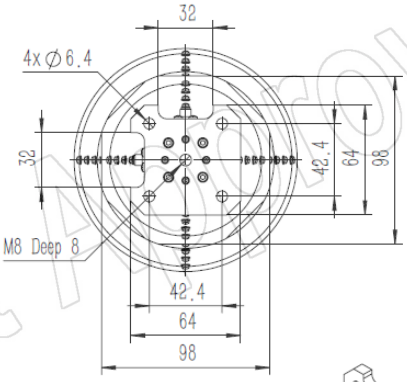

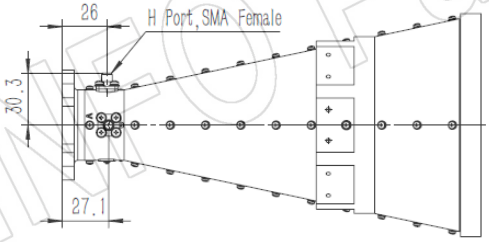

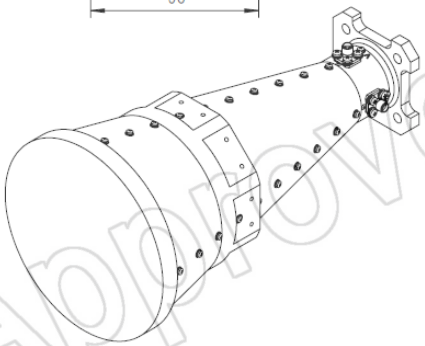

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

SMA-Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-CSJ-20180-L & LB-CSJ-20200-SFSPO. Outdoor Application)

For N-Female output outline drawing, please contact A-INFO.

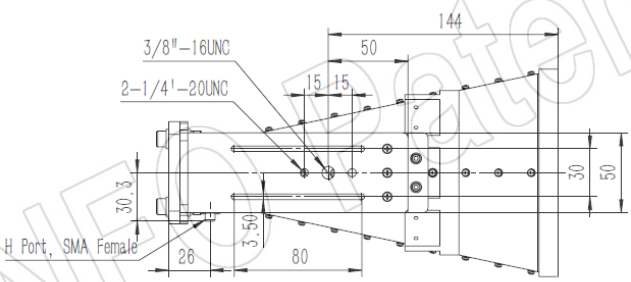

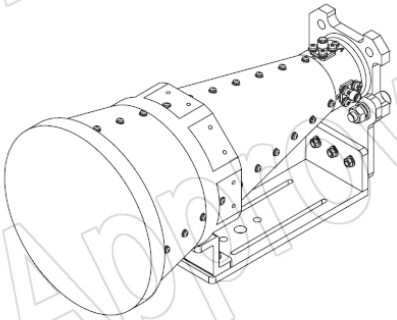

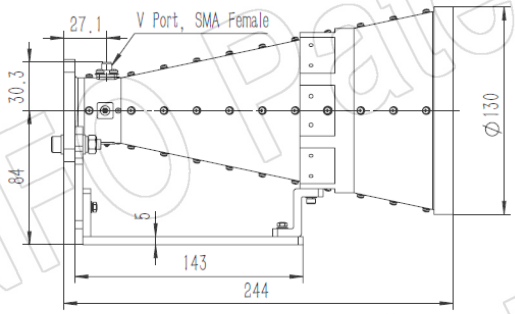



A-INFO Patent Approved

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

Test Results

1. Gain and Antenna Factor

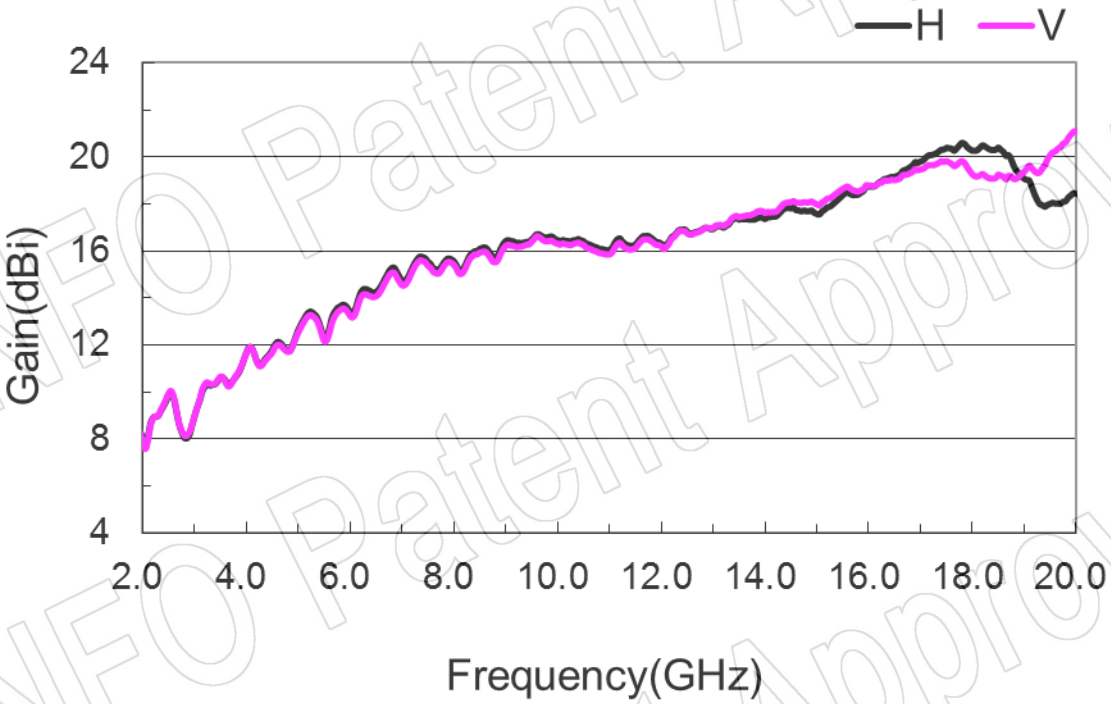

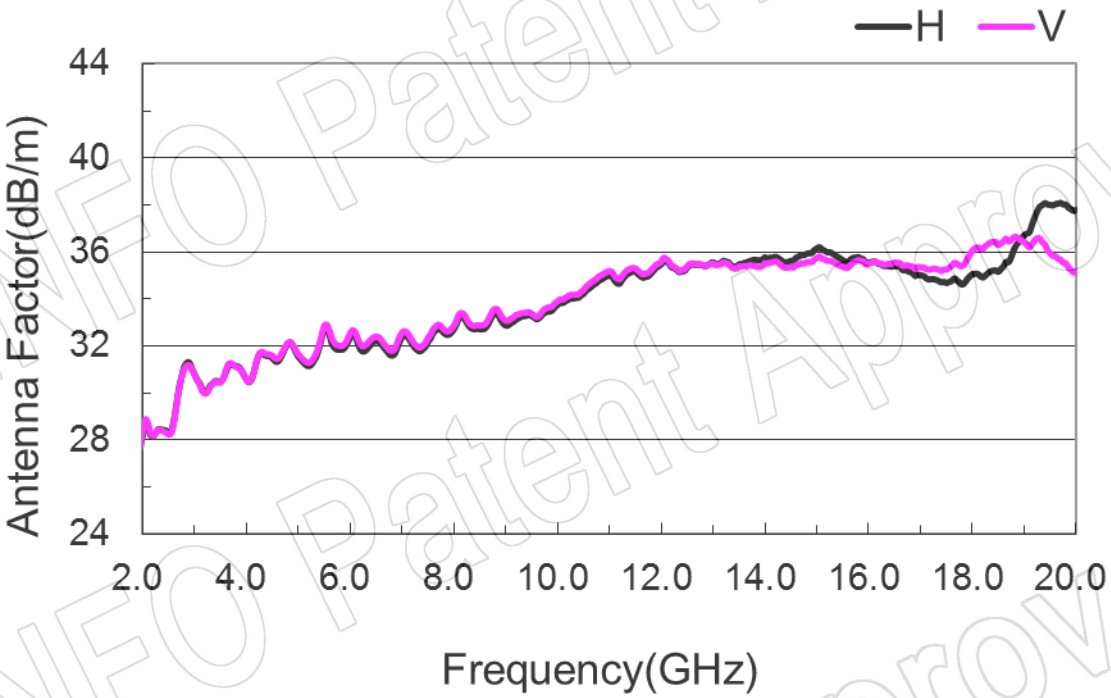

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670
Website: www.ainfoinc.com
Email: sales@ainfoinc.com
Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

2. Cross Polarization Isolation

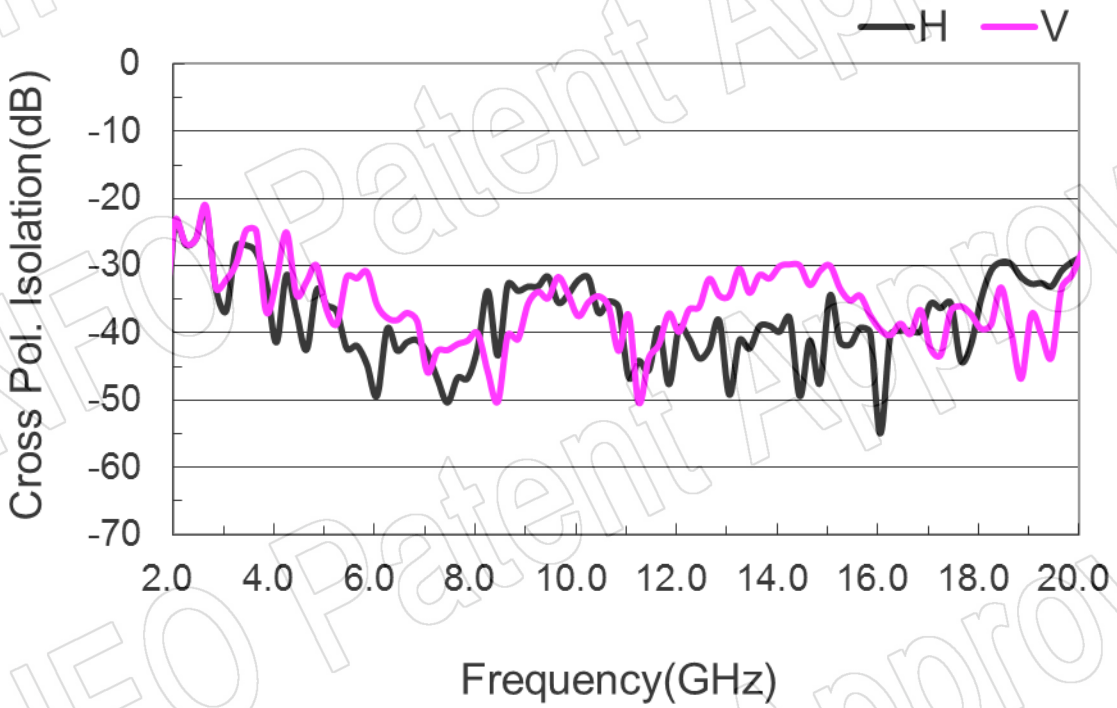

3. Port to Port Isolation

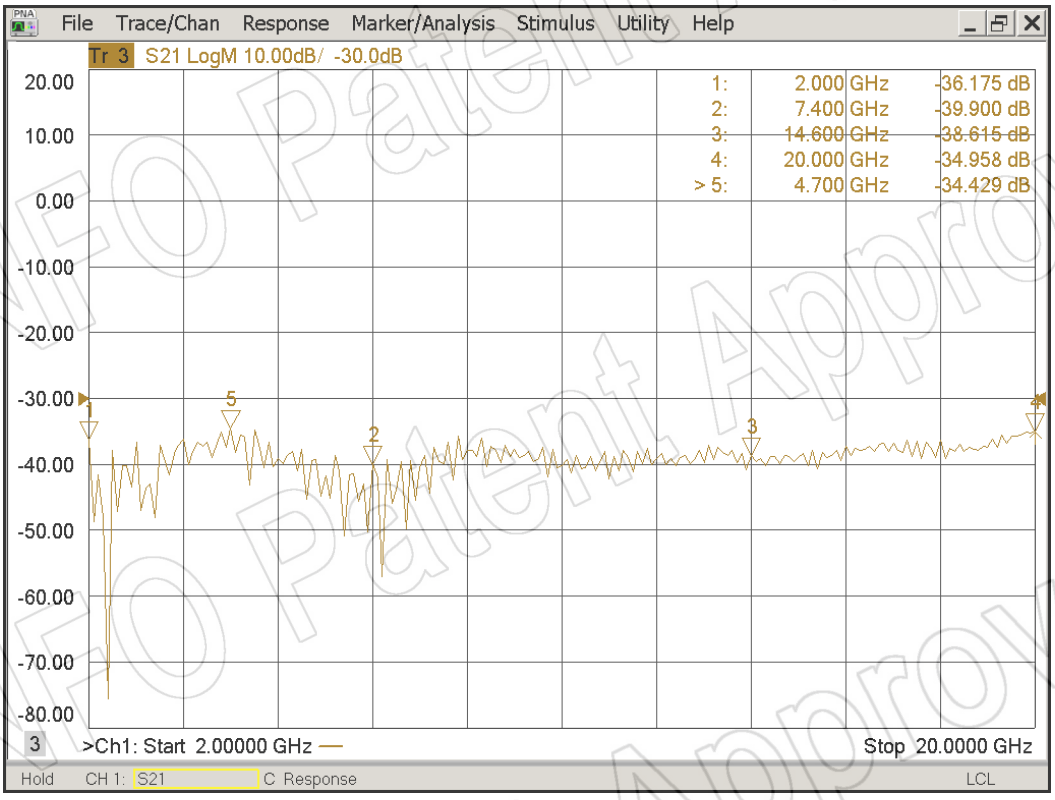

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

4. VSWR

Port-H

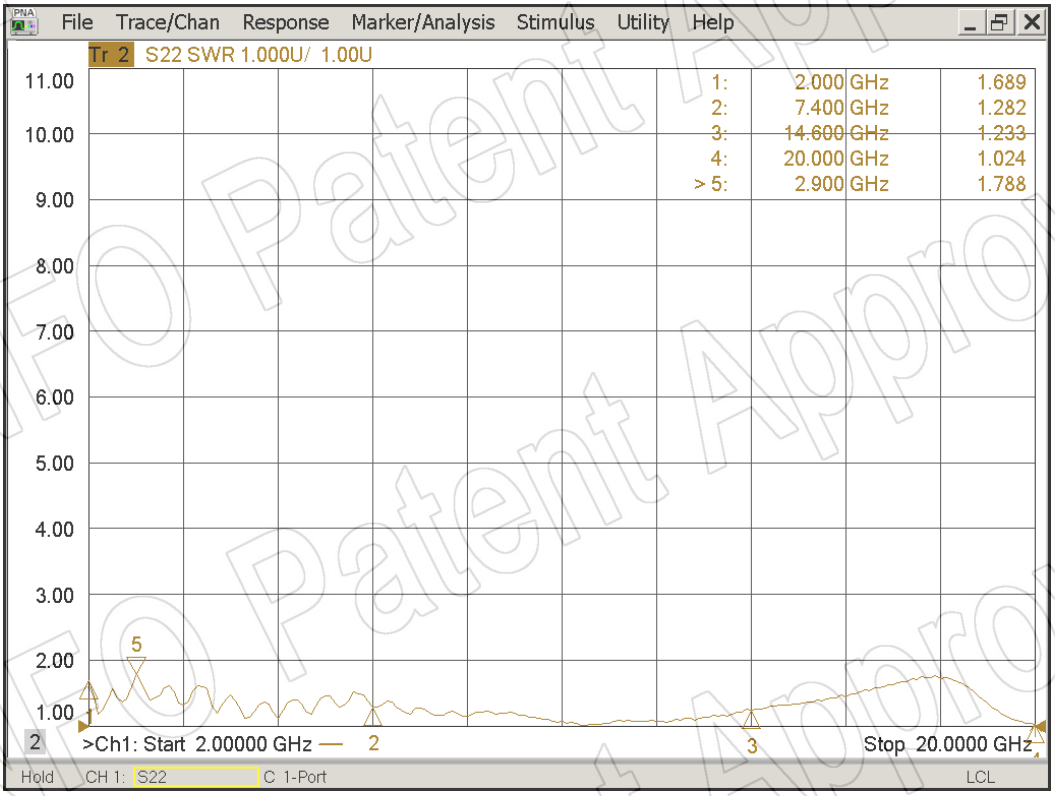

Port-V

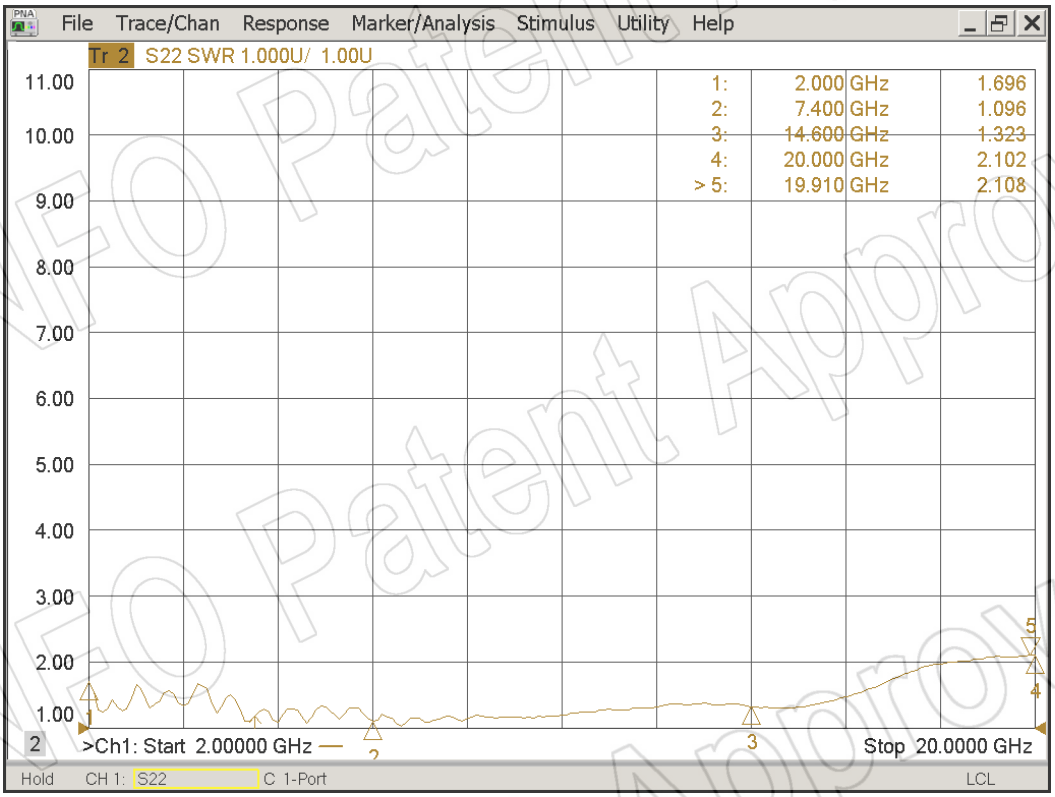

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com
Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

5. Pattern

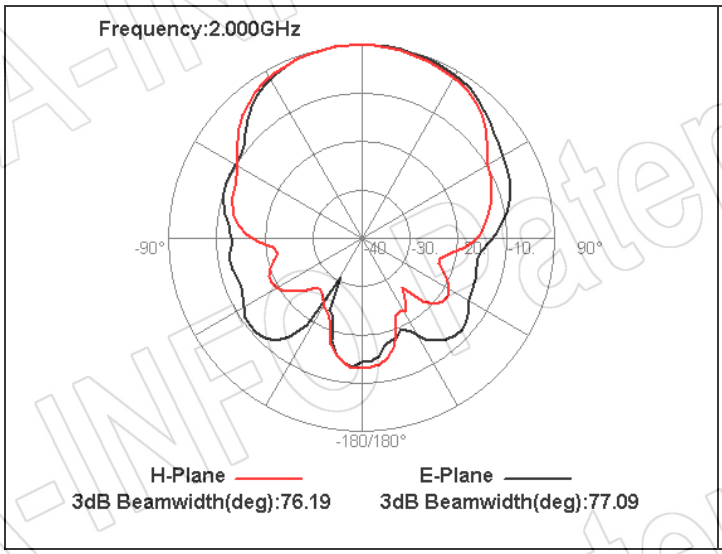

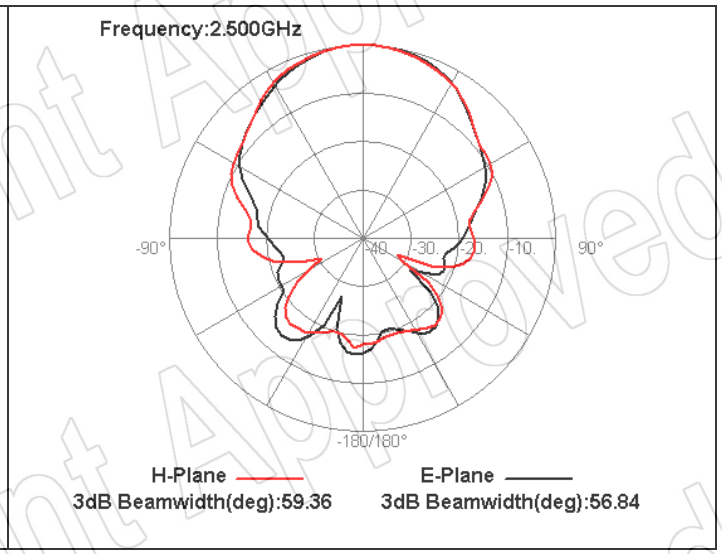

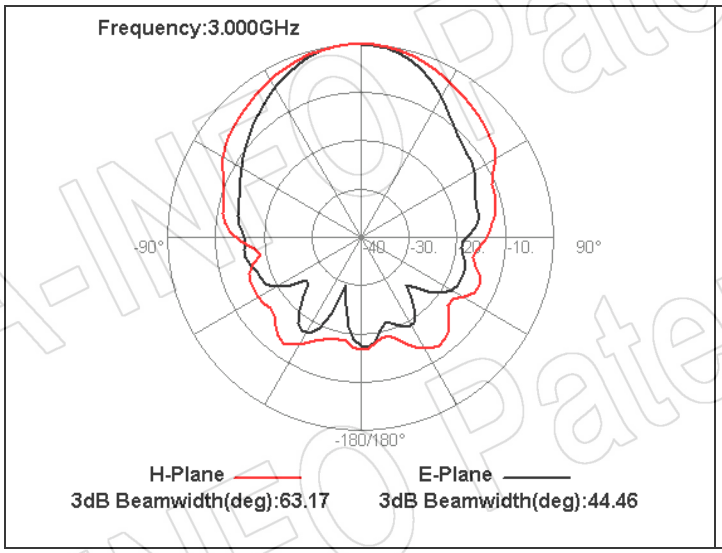

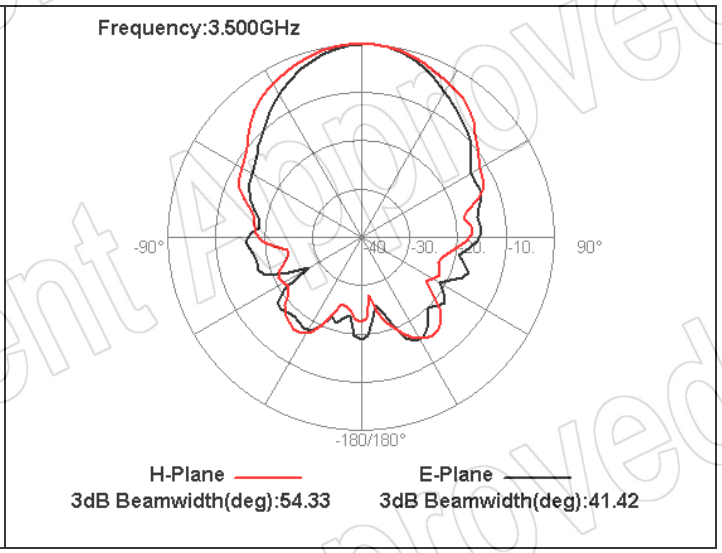

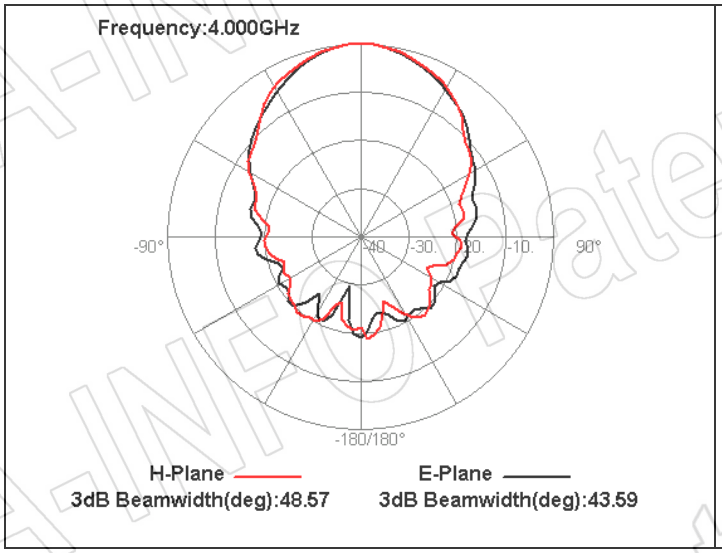

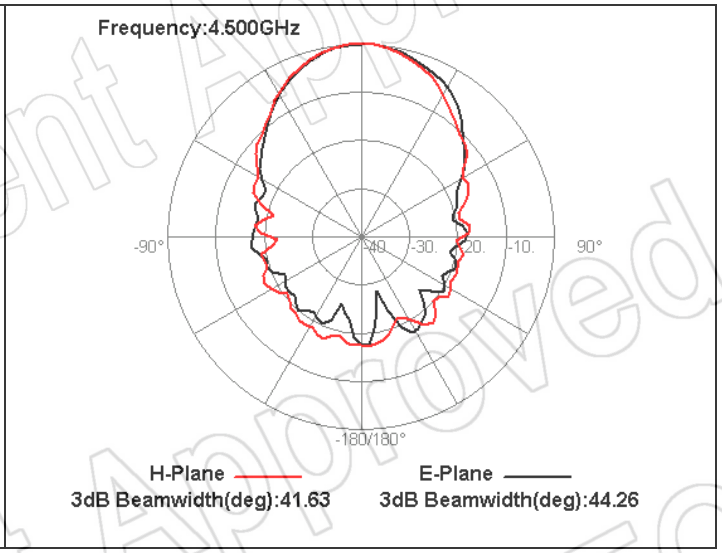

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

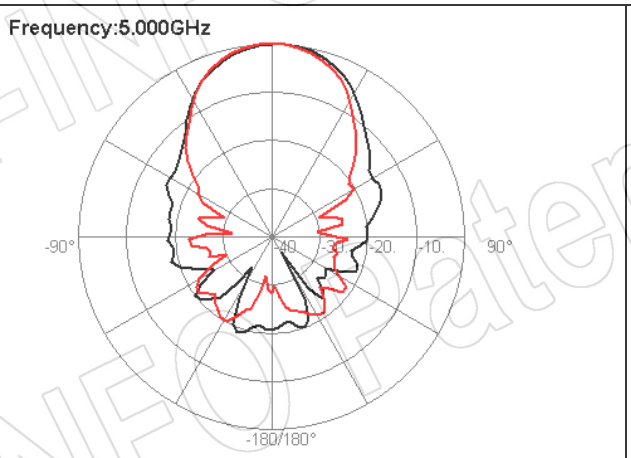

3dB Beamwidth(deg):39.43 3dB Beamwidth(deg):41.31

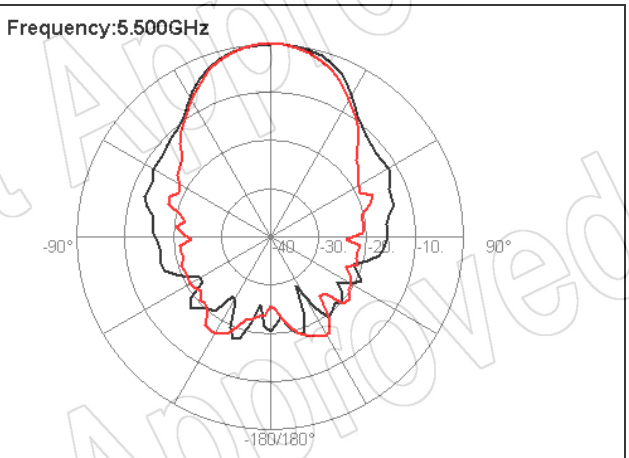

3dB Beamwidth(deg):38.50 3dB Beamwidth(deg):43.68

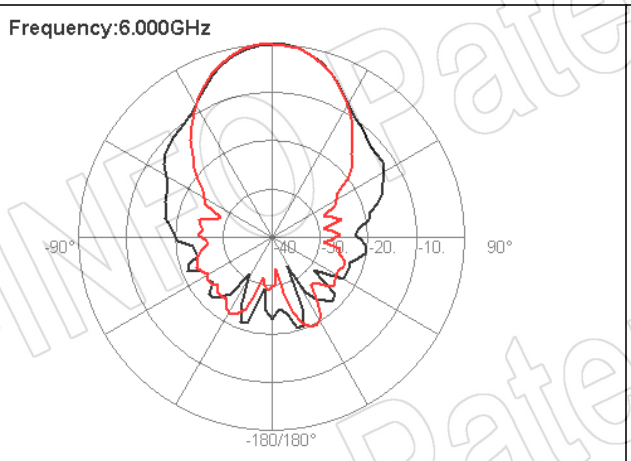

3dB Beamwidth(deg):34.57 3dB Beamwidth(deg):34.11

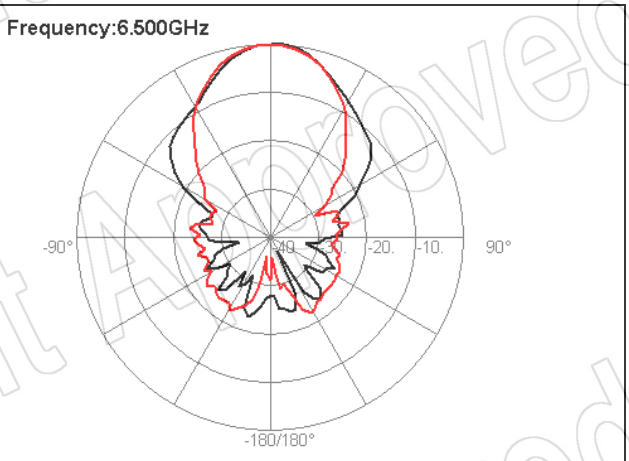

3dB Beamwidth(deg):32.34 3dB Beamwidth(deg):31.21

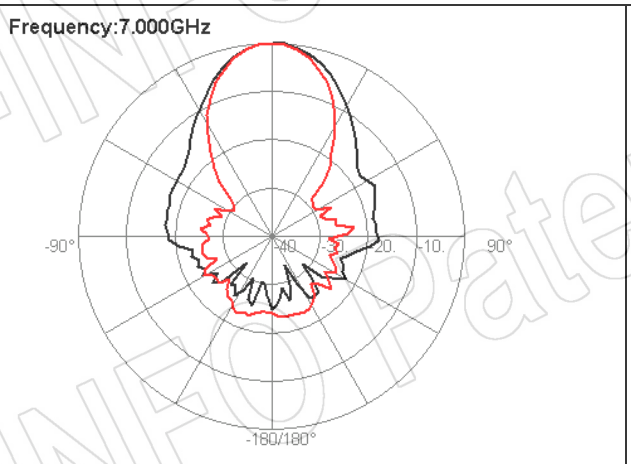

3dB Beamwidth(deg):26.99 3dB Beamwidth(deg):30.67

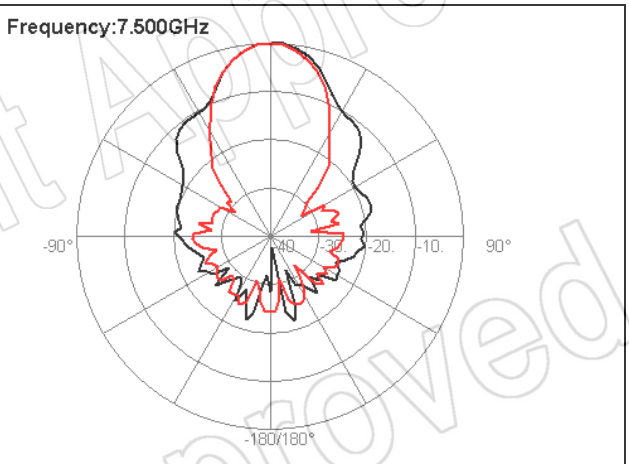

3dB Beamwidth(deg):25.50 3dB Beamwidth(deg):26.68

A-INFO Patent Approved

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

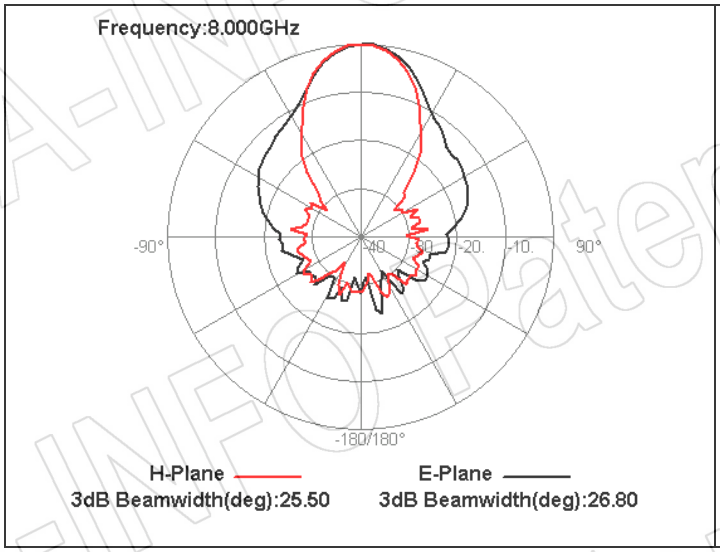

3dB Beamwidth(deg):25.50 3dB Beamwidth(deg):26.80

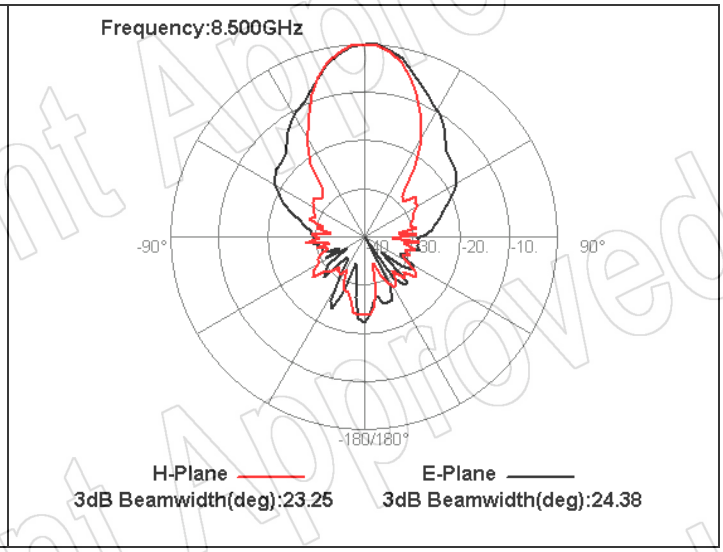

3dB Beamwidth(deg):23.25 3dB Beamwidth(deg):24.38

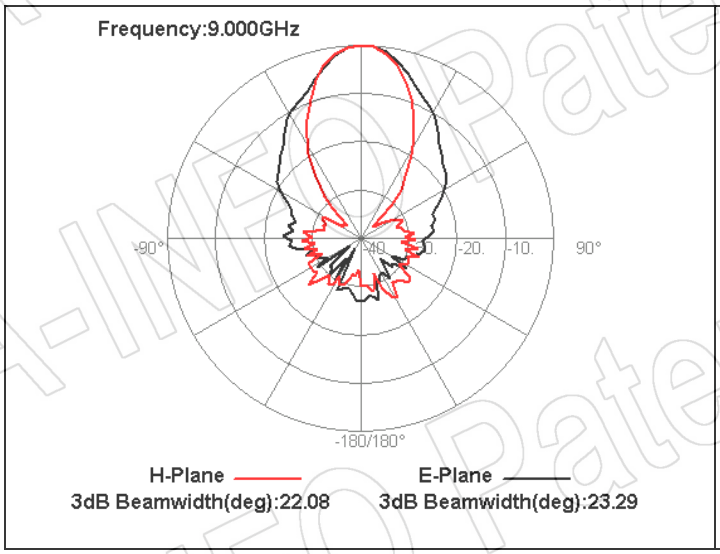

3dB Beamwidth(deg):22.08 3dB Beamwidth(deg):23.29

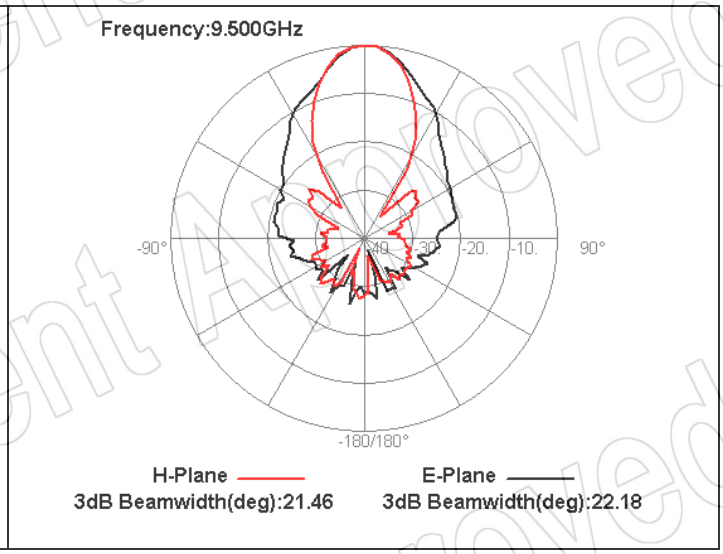

3dB Beamwidth(deg):21.46 3dB Beamwidth(deg):22.18

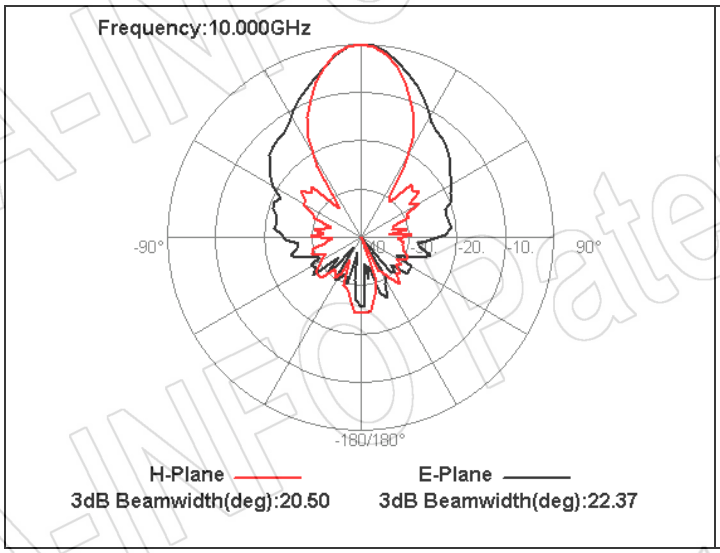

3dB Beamwidth(deg):20.50 3dB Beamwidth(deg):22.37

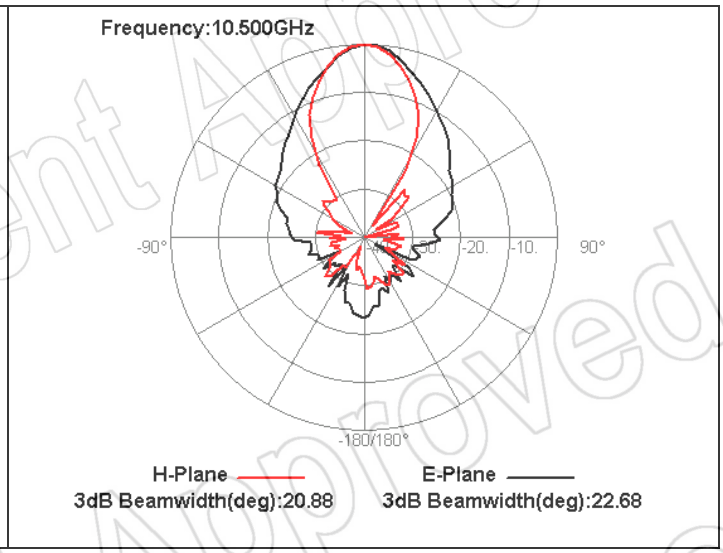

3dB Beamwidth(deg):20.88 3dB Beamwidth(deg):22.68

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

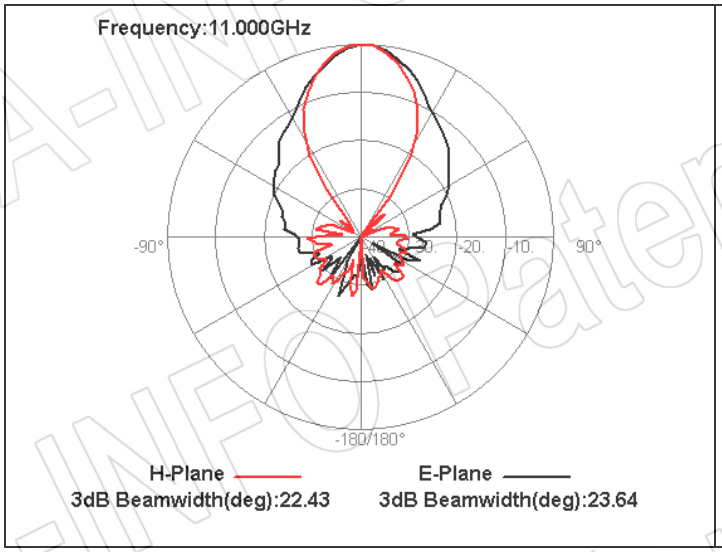

3dB Beamwidth(deg):22.43 3dB Beamwidth(deg):23.64

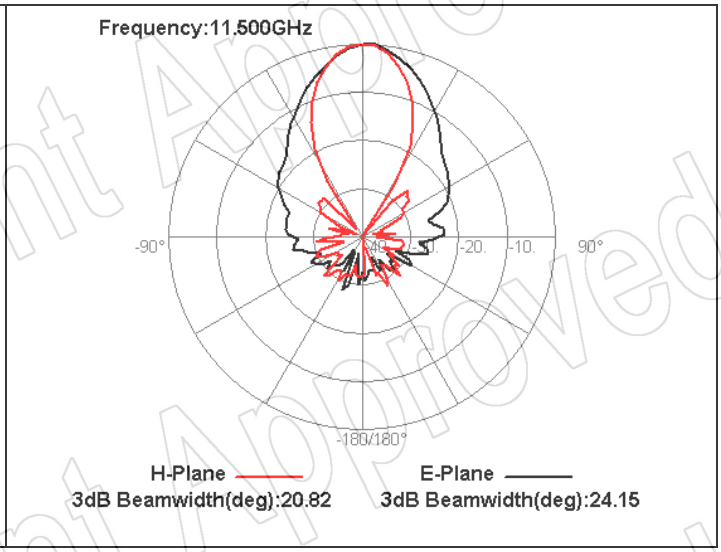

3dB Beamwidth(deg):20.82 3dB Beamwidth(deg):24.15

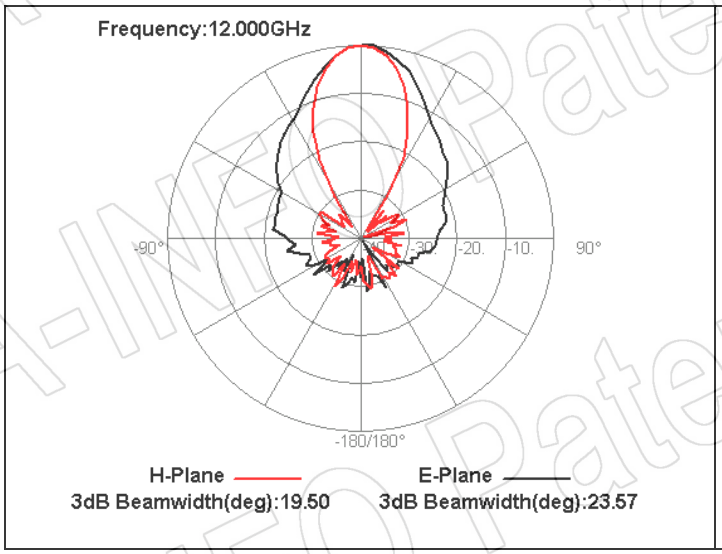

3dB Beamwidth(deg):19.50 3dB Beamwidth(deg):23.57

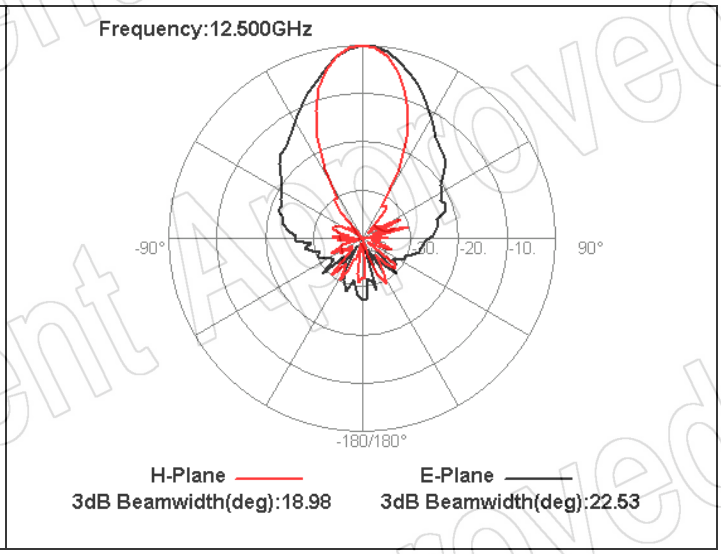

3dB Beamwidth(deg):18.98 3dB Beamwidth(deg):22.53

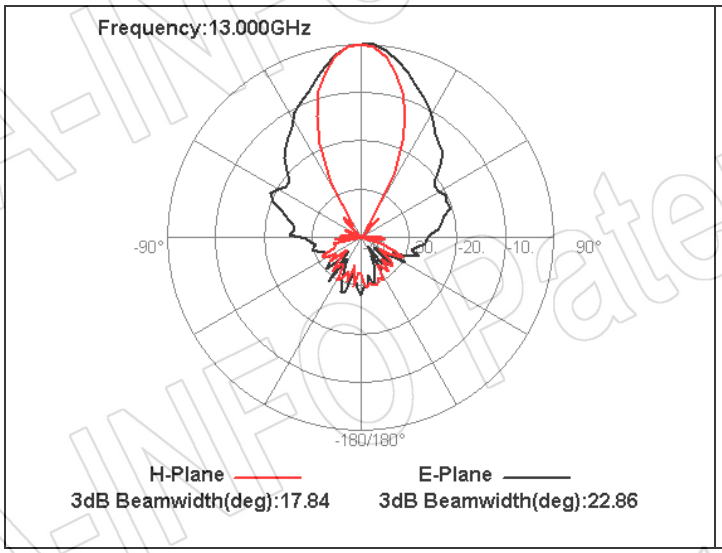

3dB Beamwidth(deg):17.84 3dB Beamwidth(deg):22.86

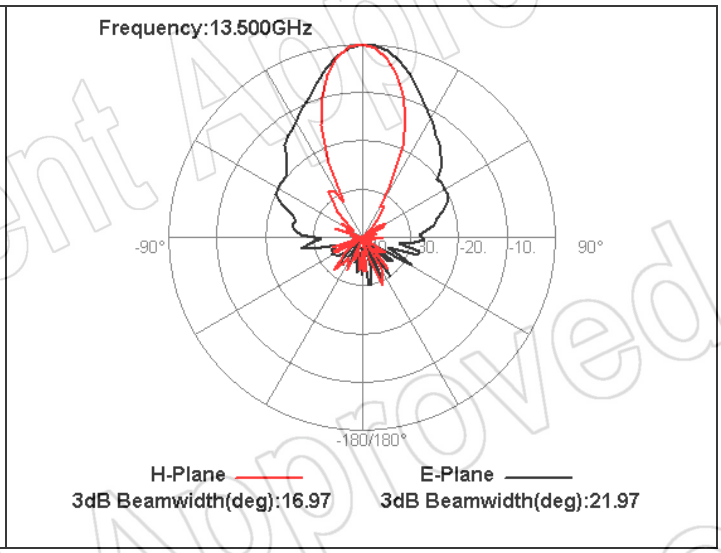

3dB Beamwidth(deg):16.97 3dB Beamwidth(deg):21.97

A-INFO Patent Approved

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

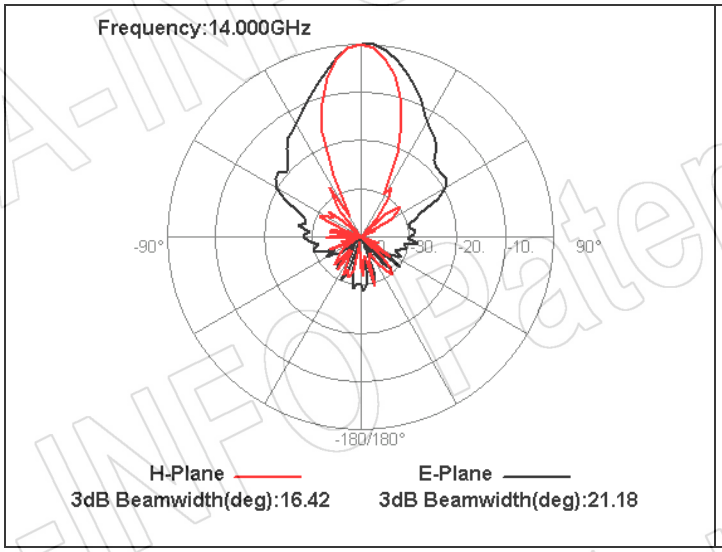

3dB Beamwidth(deg):16.42 3dB Beamwidth(deg):21.18

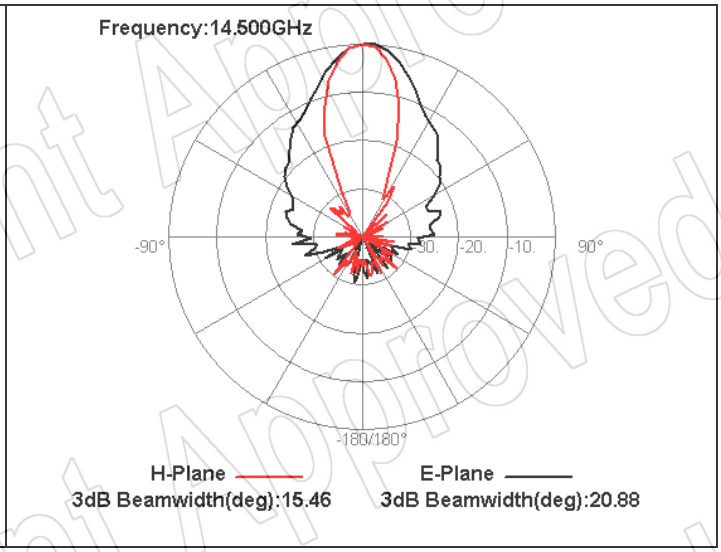

3dB Beamwidth(deg):15.46 3dB Beamwidth(deg):20.88

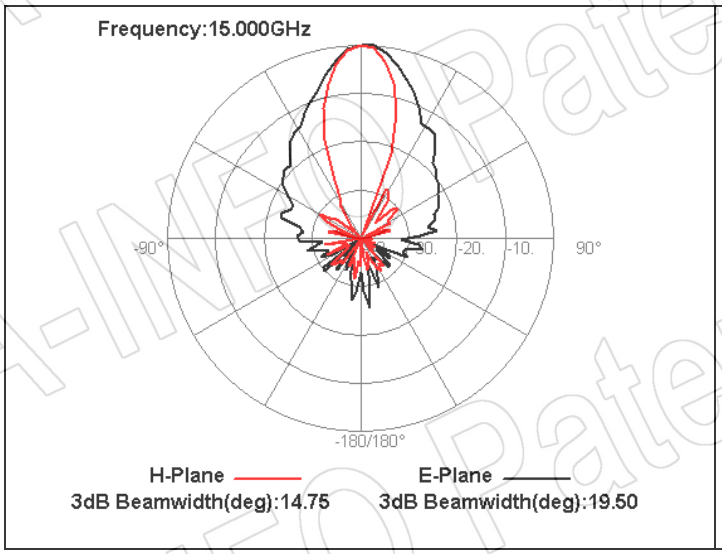

3dB Beamwidth(deg):14.75 3dB Beamwidth(deg):19.50

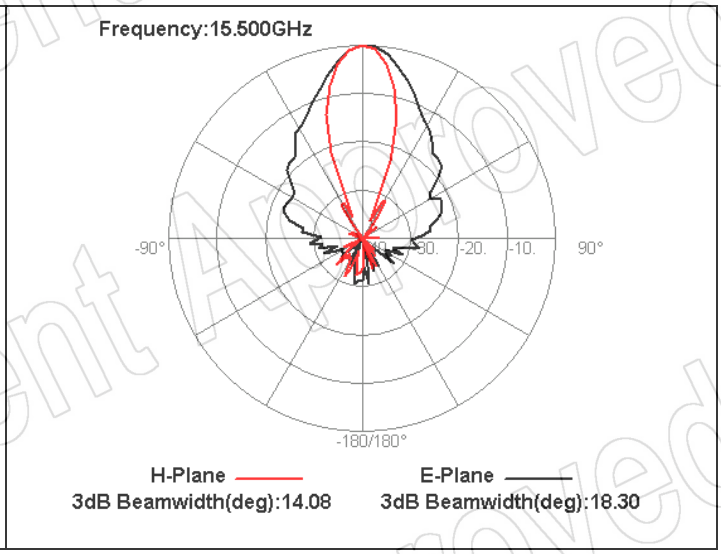

3dB Beamwidth(deg):14.08 3dB Beamwidth(deg):18.30

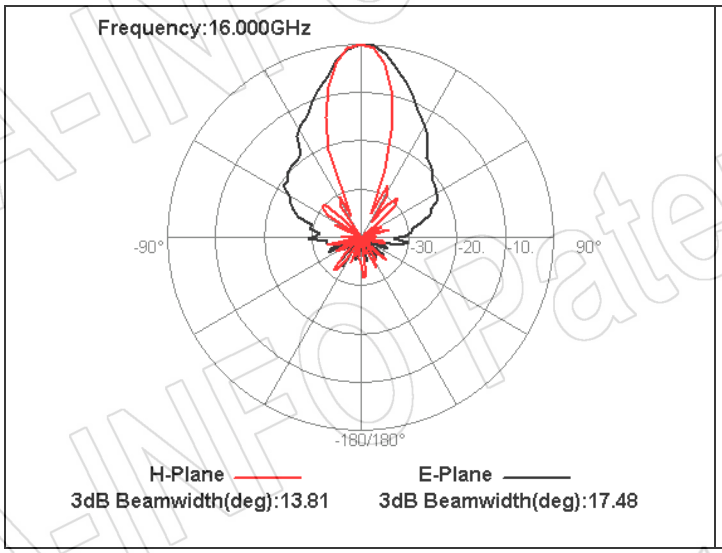

3dB Beamwidth(deg):13.81 3dB Beamwidth(deg):17.48

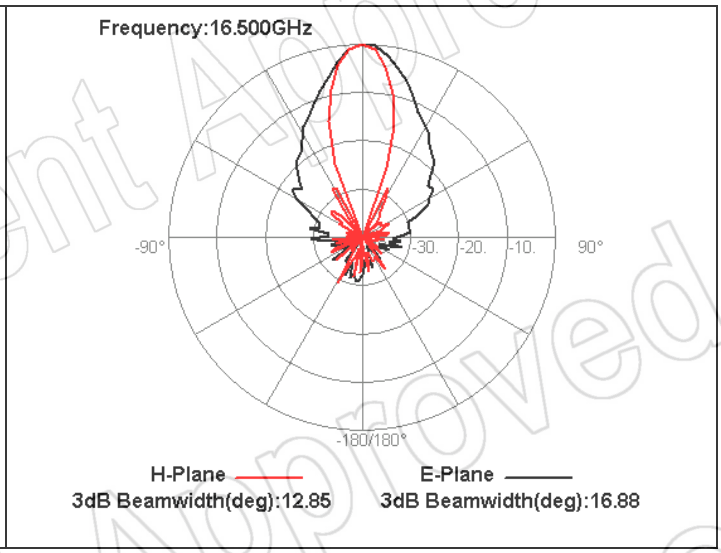

3dB Beamwidth(deg):12.85 3dB Beamwidth(deg):16.88

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

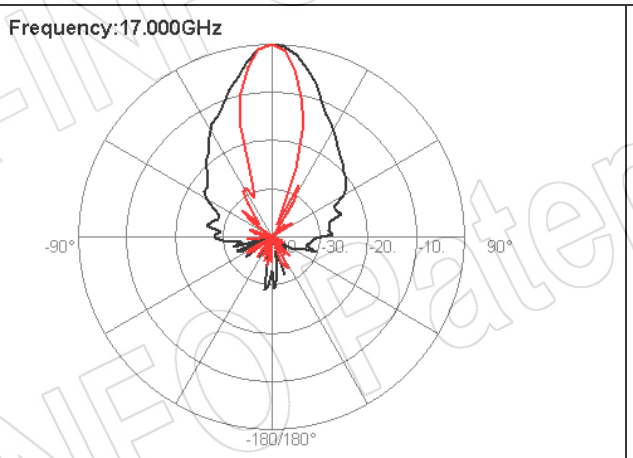

3dB Beamwidth(deg):12.06 3dB Beamwidth(deg):16.51

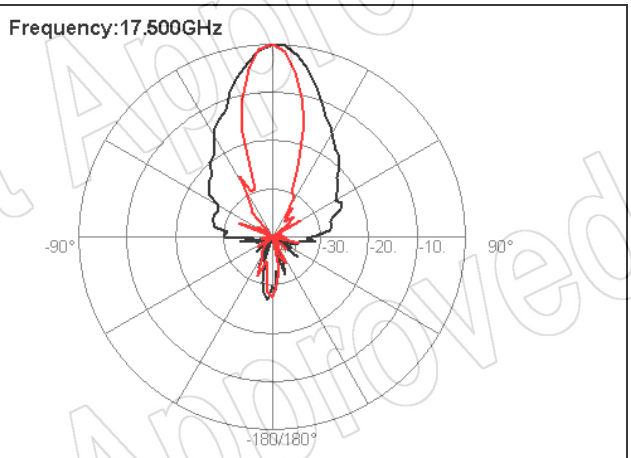

3dB Beamwidth(deg):11.42 3dB Beamwidth(deg):16.43

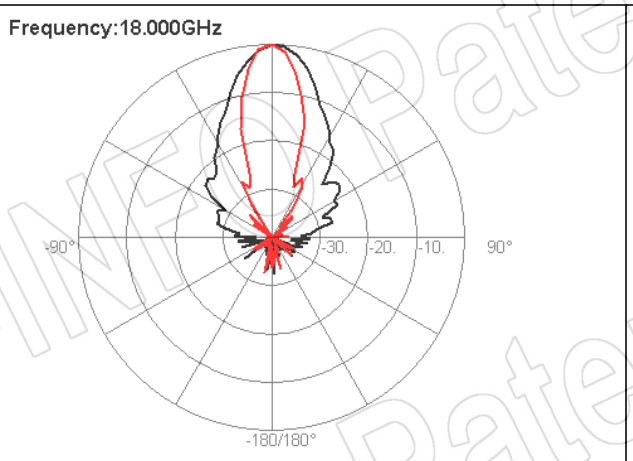

3dB Beamwidth(deg):11.48 3dB Beamwidth(deg):16.68

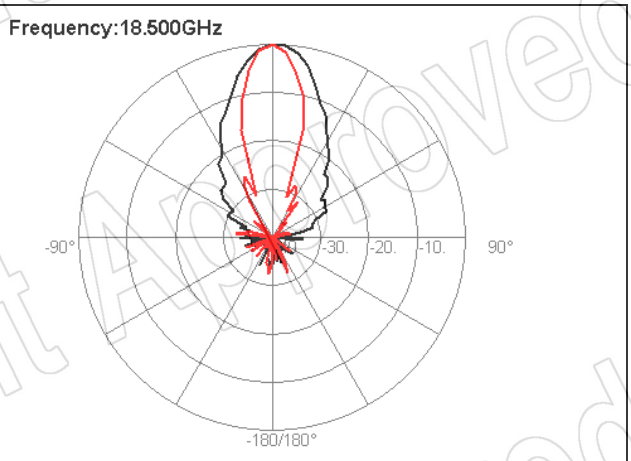

3dB Beamwidth(deg):11.32 3dB Beamwidth(deg):18.21

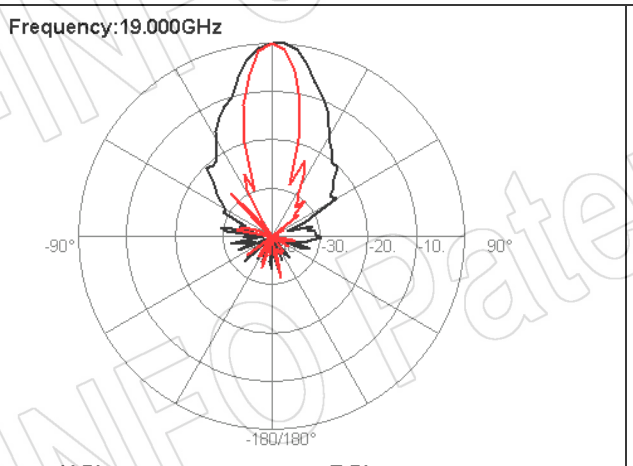

3dB Beamwidth(deg):10.76 3dB Beamwidth(deg):18.79

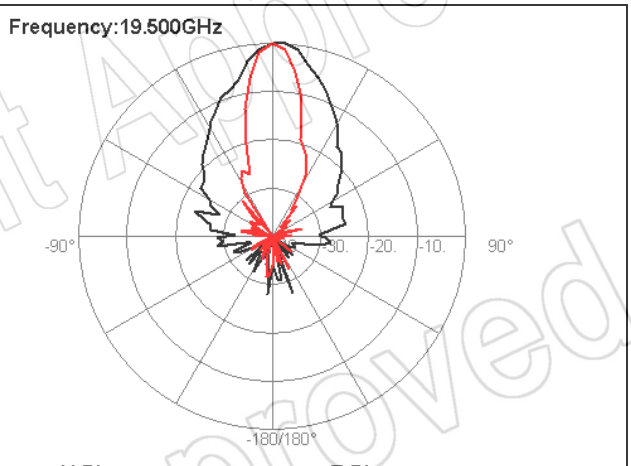

3dB Beamwidth(deg):10.40 3dB Beamwidth(deg):17.82

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

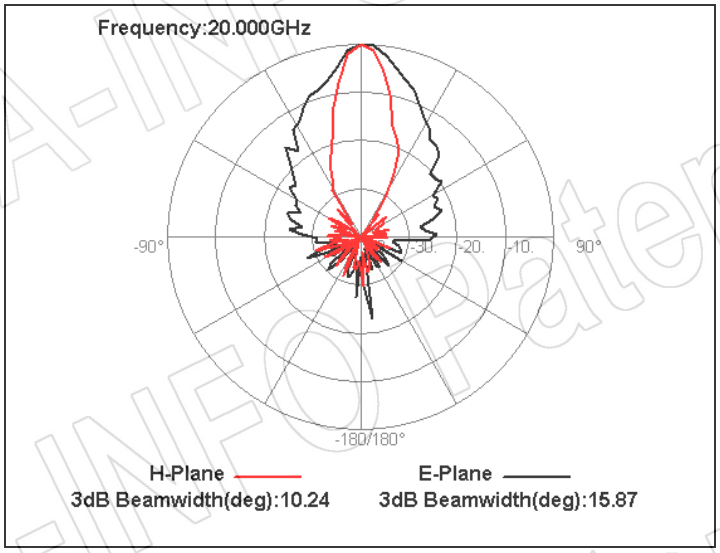

A-INFO Patent Approved

China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068 Website: www.ainfoinc.com
USA : Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670 Email: sales@ainfoinc.com

Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com