


Technical Specification


Frequency Range	Gain (min)	Polarization	Power Handling	Cross Isolation (min)	Connector
5.0-6.0GHz	20dB	Dual Linear	>10W	30dB	SMA-Female

Outline Drawing (Size: mm)

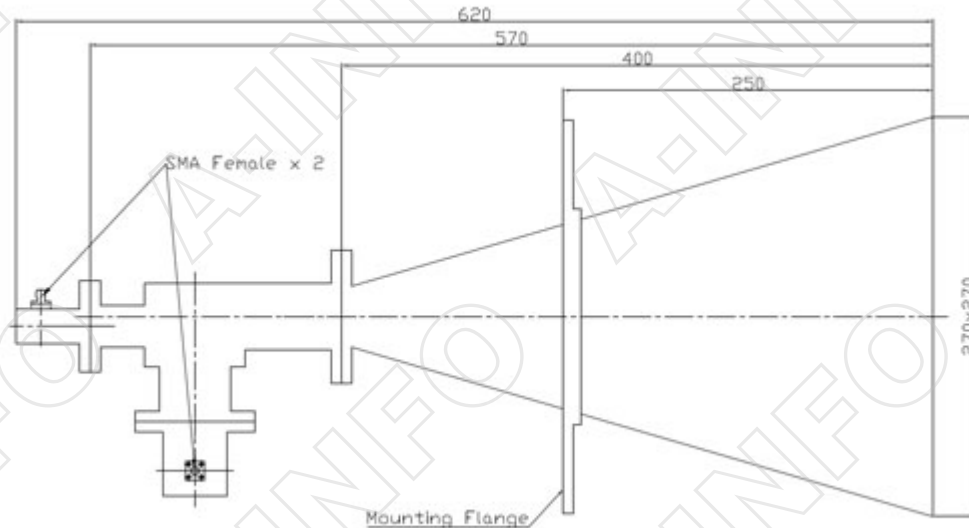


Test Results


1. Gain

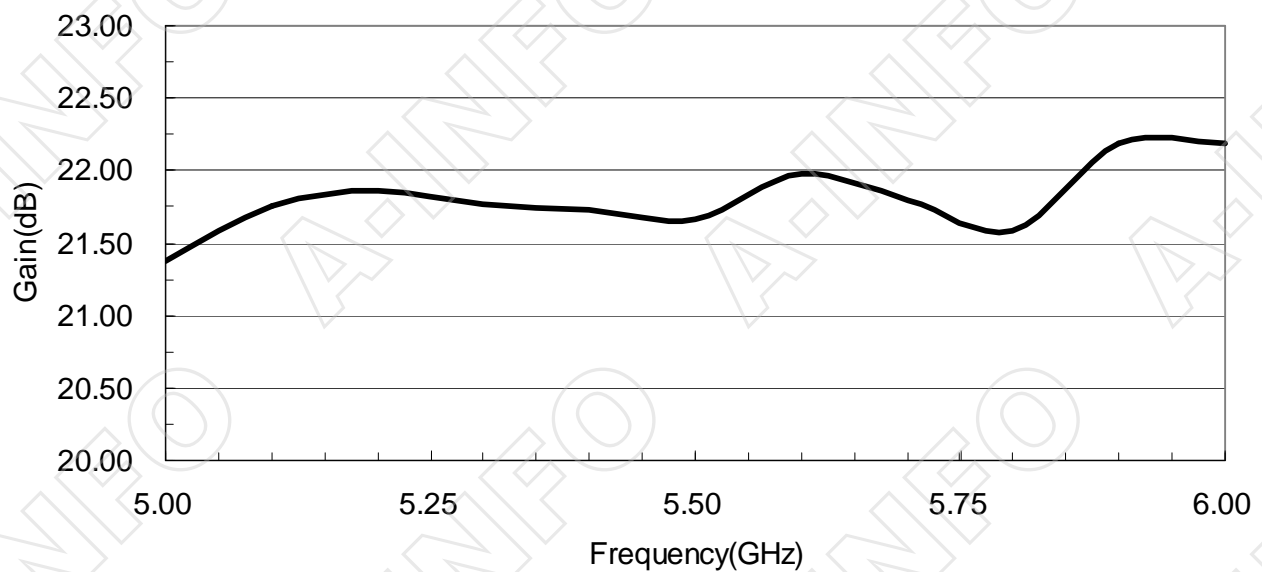


2. Cross Polarization Isolation

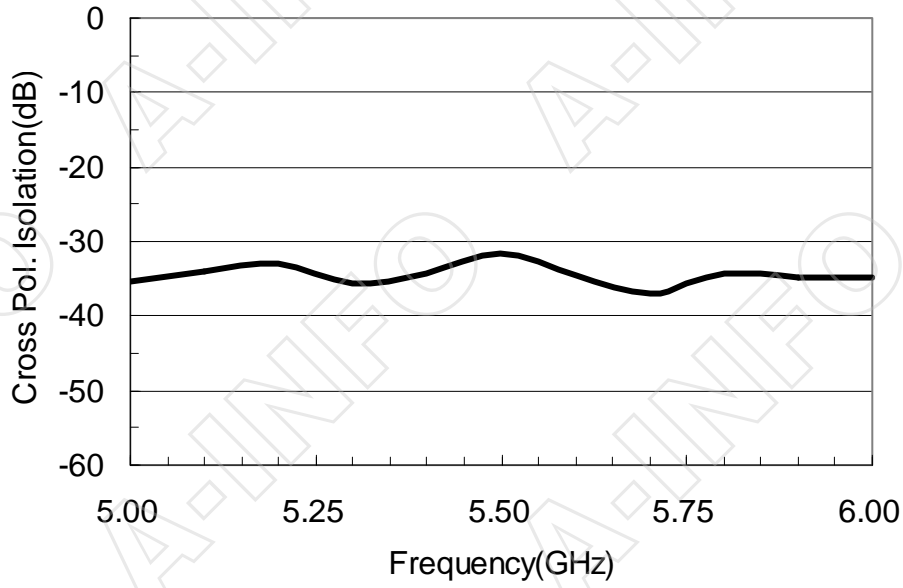


3. Port 1_VSWR

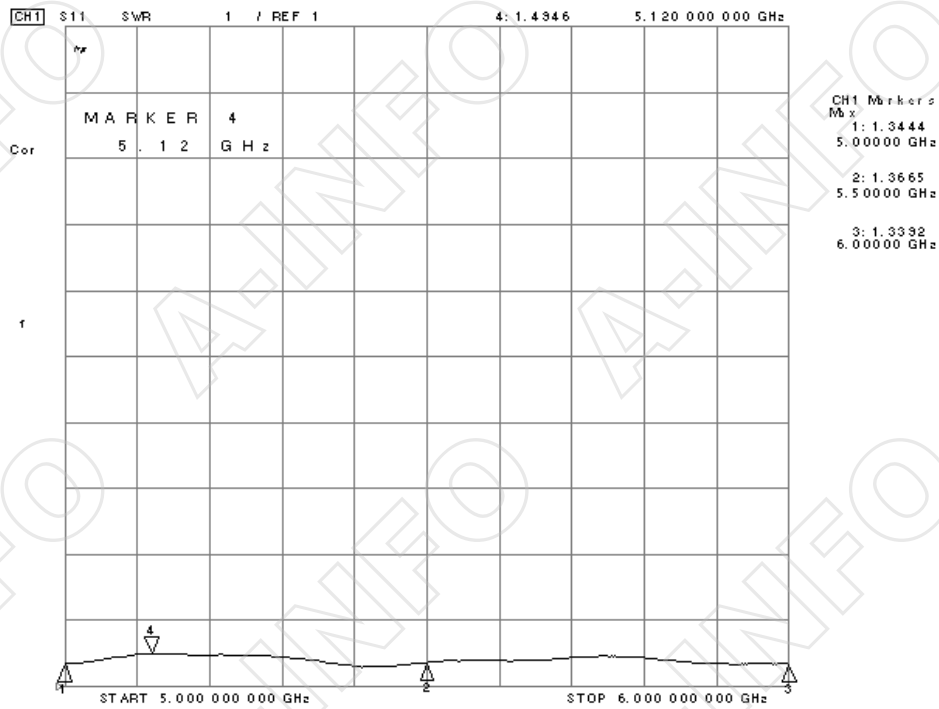

4. Port2_VSWR

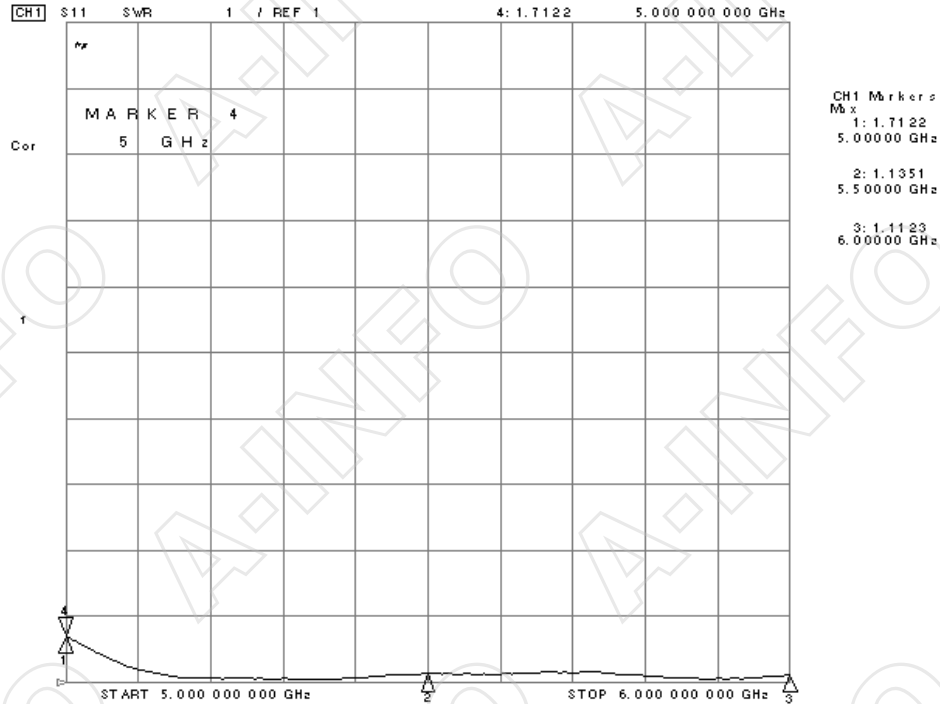


5. Port to Port Isolation

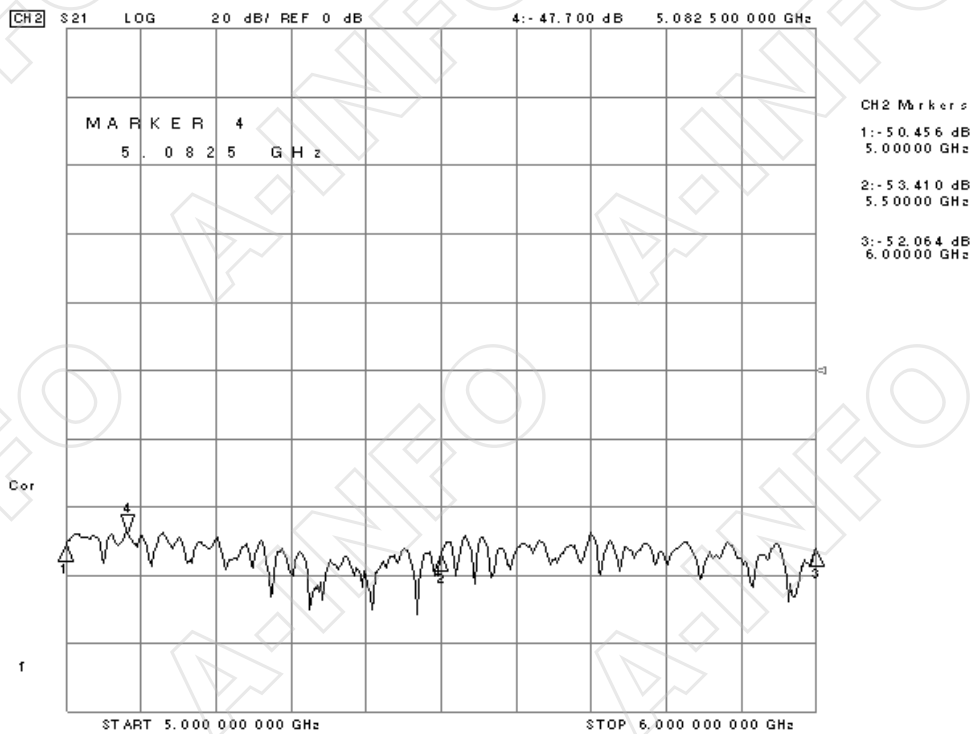


6. Pattern

5.0GHz

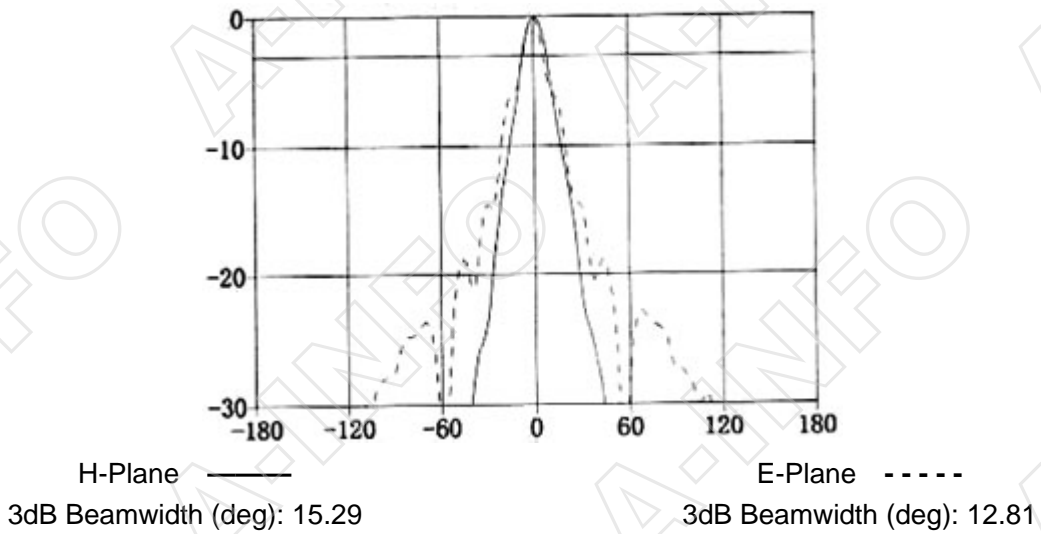

5.5GHz

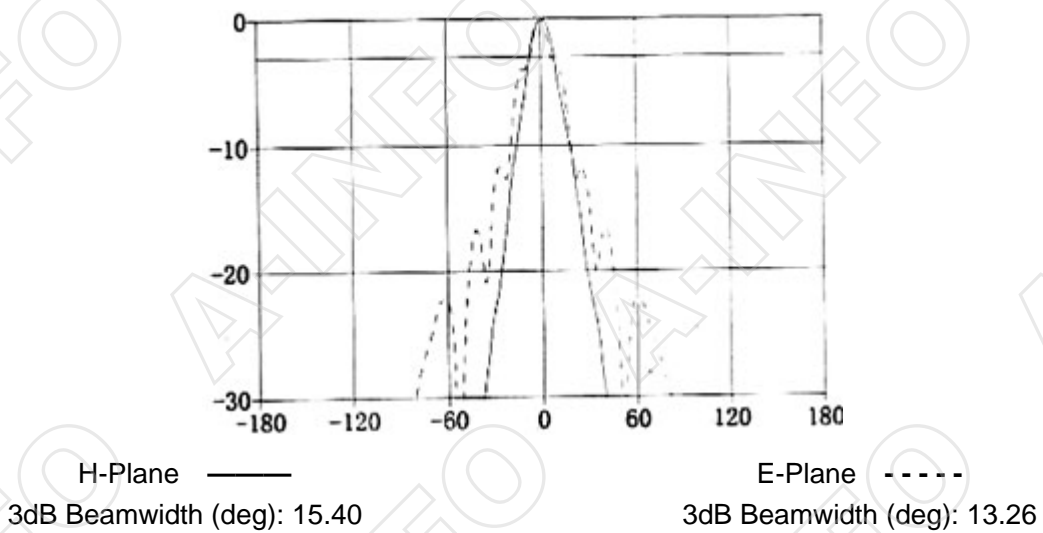

6.0GHz

