
PEARSON[™] CURRENT MONITOR MODEL 1330

Sensitivity	0.
Output resistance	50
Maximum peak current	10
Maximum rms current	1,
Droop rate	1.
Useable rise time	0.
Current time product	65
Low frequency 3dB cut-off	0.
High frequency 3dB cut-off	1.
l/f figure	40
Output connector	U
Shielding	Do
Operating temperature	0
Weight	17

0.005 Volt/Ampere +1/-0% 50 Ohms 100,000 Amperes 1,400 Amperes 1.0 %/millisecond 0.25 microseconds 65 Ampere-second 0.9 Hz (approximate) 1.5 MHz (approximate) 400 peak Amperes/Hz UHF (SO-239) Double 0 to 65 °C 17.7 pounds

© 1999 Pearson Electronics, Inc. 1330.SPX-990506

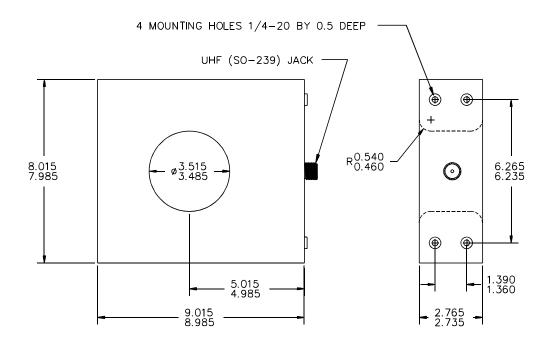

Distributed by: Reliant EMC LLC, 3311 Lewis Ave, Signal Hill CA 90755, 408-916-5750, www.reliantemc.com