


Surge coupling impedances

For component test or tests on cable shields

CWG 550

18 μ F


Cable 35 cm
Weight 490 g



CWG 553

0,5 μ F + 40 Ohm

Cable 90 cm
Weight 452 g

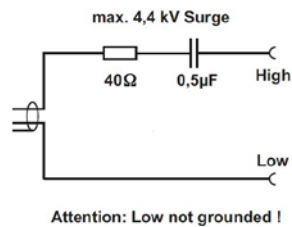


Technical data

Surge voltage
Input connection
Output connection
Operation temperature
Housing

Max. 4400 V
Surge HV connector (Fischer S105 A039)
4mm MC safety banana jack
0 until 40° Celsius
Plastic; 200 mm x 110 mm, h: 75 mm

Connector on surge generator

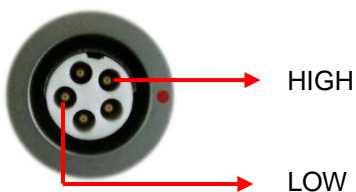

To the ext. coupling network (CWG 520; CWG 152x etc.)
or to the coupling impedance (CWG 550; CWG 553).